

PULSE GENERATOR
PERFORMANCE CHECK

Model: *M-1010 C*

S.N.: *9722*

Date: *Feb 19 2001*

- a) Output signal amplitude:
0 to $\pm 100V$ ($R_L \geq 50\Omega$)
- b) Pulse width:
50 ns to 10 μ s
- c) Rise time:
*(10% max duty cycle)
 $\leq 10 ns$*
- d) Fall time:
 $\leq 10 ns$
- e) PRF:
0 to 10 MHz
- f) Jitter, stability:
*(10% max duty cycle)
OK*
- g) Prime power:
*120/240 V
50-60 Hz*
[Signature]


(A)

9722

NARROW PULSE

P_{out}

$$R_c = 50 \Omega$$

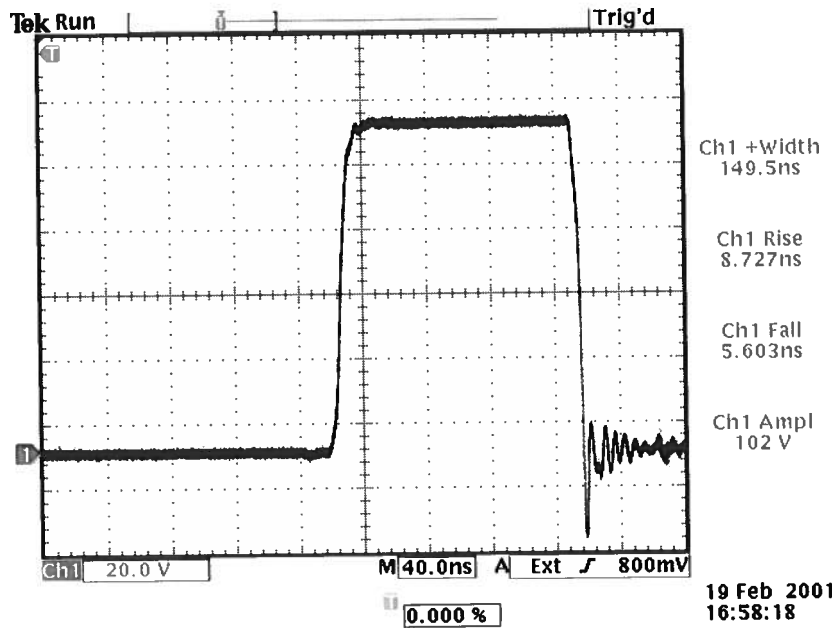


(B)

9722

WIDE PULSE

Part

$R_c = 50 \Omega$

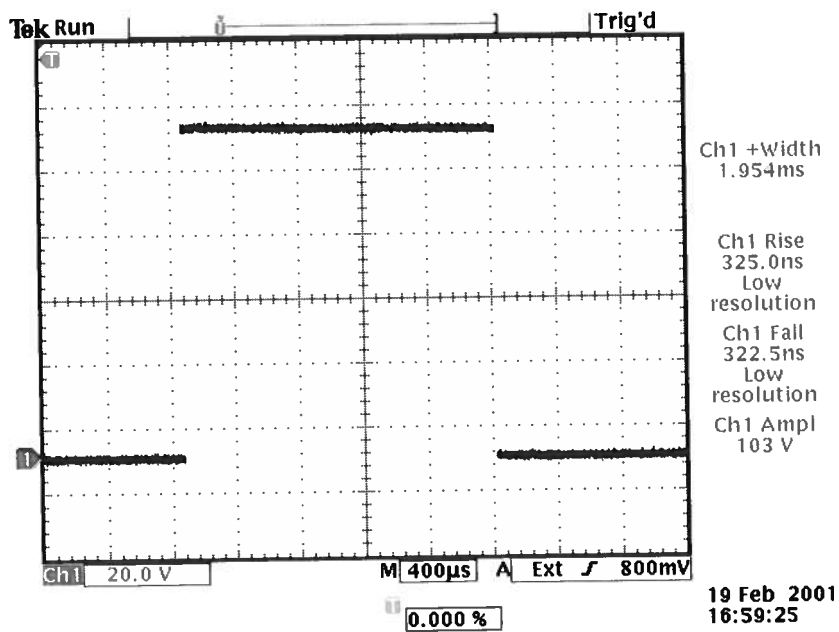

©

9722
MEDIUM PULSE WIDTH
30 V RANGE
 $R_c = 50 \Omega$

