

# PULSE GENERATOR


## PERFORMANCE CHECK

Model: AV-110A-PS

S.N.: 9842

Date: June 7, 2001

### Maximum Amplitude Test:

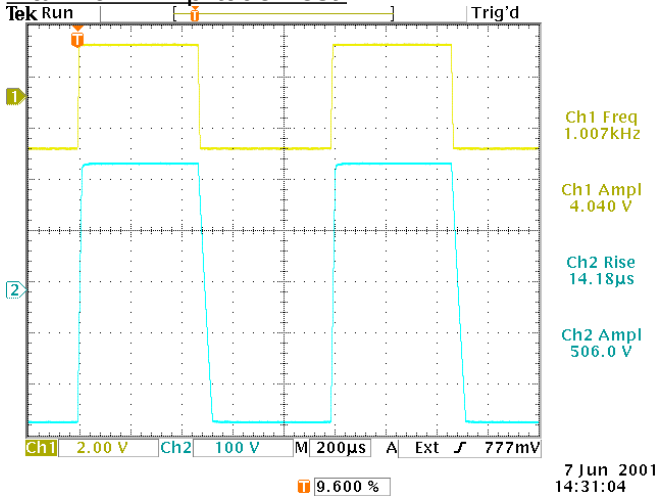

Top: Input,  $\pm 2V$  amplitude. 2 V/div, 200 us/div  
Bottom: Output,  $\pm 500V$ . 200V/div, 200 us/div. (A 2:1 attenuator with a total impedance of 100 k $\Omega$  was used to observe the output waveform.)

a) Output Signal Amplitude: 0 to  $\pm 500V$

b) Gain: x1 to x250

c) Rise Time: < 35 us


d) Fall Time: < 35 us

e) PRF: DC - 3 kHz

f) Jitter, Stability: OK

g) Prime Power: 120/240V AC, 50-60 Hz,

### Arbitrary Input Test:

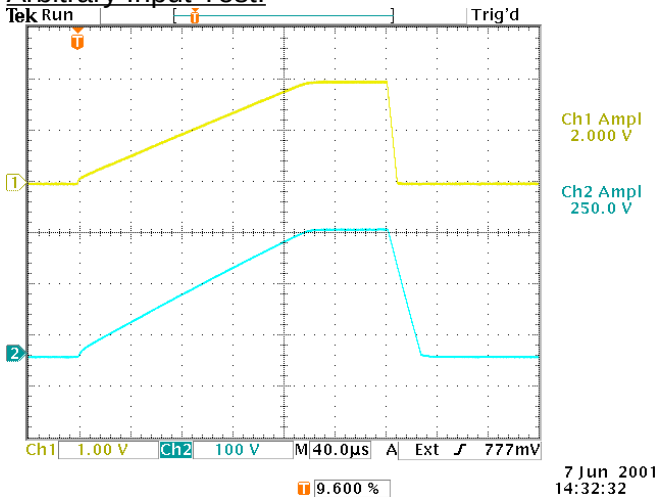

Top: Input, 0 to +2V amplitude. 2 V/div, 200 us/div  
Bottom: Output, 0 to +500V. 200V/div, 40 us/div. (A 2:1 attenuator with a total impedance of 100 k $\Omega$  was used to observe the output waveform.)