


PULSE GENERATOR  
PERFORMANCE CHECK

Model: AV-1000-C

S.N.: 10513


Date: January 17, 2003

Rise Time Test:

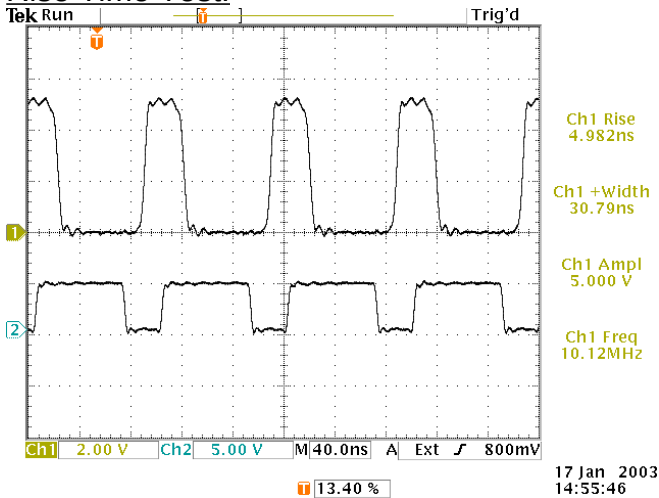

Top: +5V into 50Ω, 10 MHz  
Bottom: NOT TTL OUT, same settings  
Both: 5 V/div, 40 ns/div.

50 MHz Test:

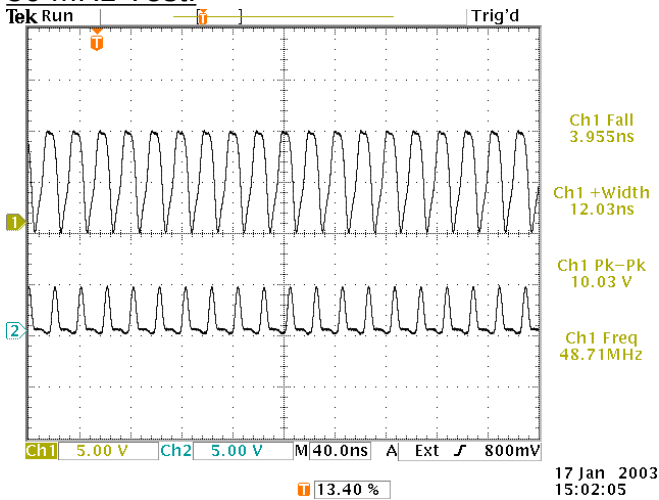

Top: +10V into 50Ω, near minimum pulse width and at maximum pulse repetition frequency  
Bottom: TTL OUT, same settings  
Both: 5 V/div, 20 ns/div.

a) Output Signal Amplitude: 0 to ±10V, plus TTL and ECL outputs.

b) DC Offset: 0 to ±10V

c) Pulse Width: 10 ns - 1 ms

d) Rise Time: 5 ns - 1 ms

e) Fall Time: 5 ns - 1 ms

f) PRF: 1 Hz - 50 MHz

g) Jitter, Stability: OK

h) Prime Power: 120/240V AC, 50-60 Hz,