



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AVX-SIPB-PS-R5
S.N.: 10780
Date: November 28, 2003

High Frequency, High Amplitude Test

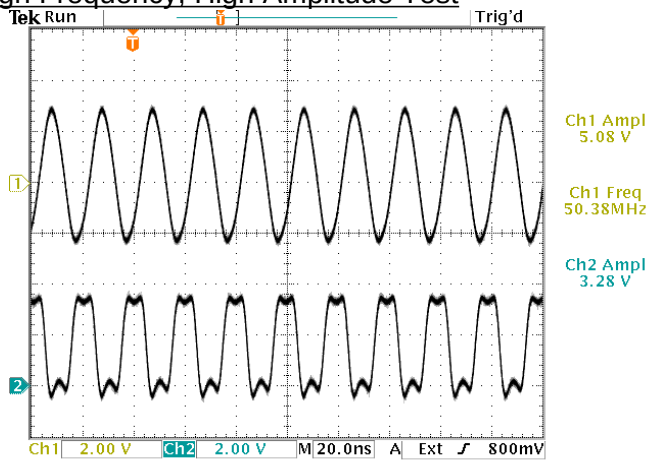


28 Nov 2003
16:15:40

Top: 50 MHz, 5 V_{P-P} sine-wave input.
Bottom: TTL output into 50Ω.
Both: 2 V/div, 20 ns/div.

- a) Output Signal Amplitude: TTL, R_L ≥ 50Ω
- b) Input Signal Amplitude: 0.2 to 5.0 Volts peak-to-peak, sine-wave.
- c) Maximum Frequency: 50 MHz
- d) Jitter, Stability: OK
- e) Prime Power: 100-240V AC, 50-60 Hz.

Low Frequency, Low Amplitude Test

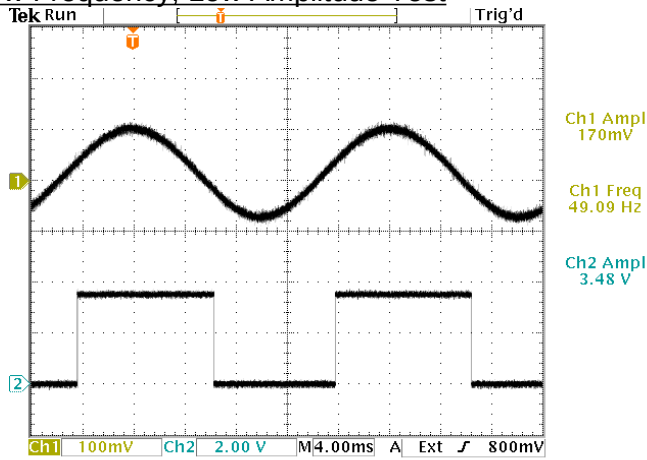

28 Nov 2003
16:16:23

Top: 50 Hz, < 0.2 V_{P-P} sine-wave input. 100 mV/div.
Bottom: TTL output into 50Ω. 2 V/div.
Both: 4 ms/div