



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET


Model: AV-151G-C
S.N.: 10805
Date: December 16, 2003

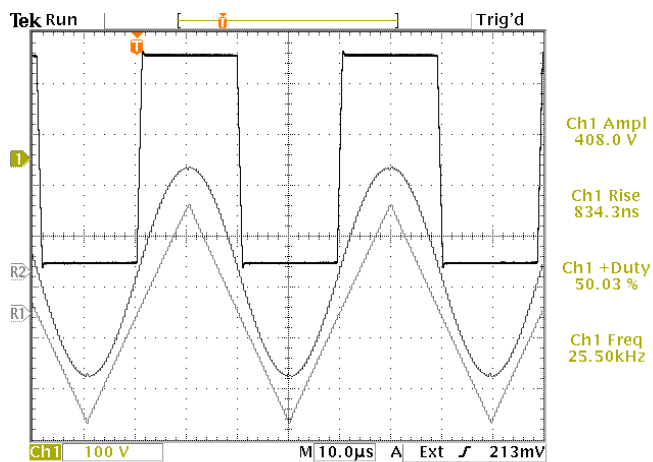

- a) Output Signal Amplitude: $\pm 200V$, to 50 k Ω
- b) Waveforms: sine, triangle, square
- c) Rise Time: 1.5 us (for square wave)
- d) Fall Time: 1.5 us (for square wave)
- e) PRF: DC to 350 kHz

16 Dec 2003 14:11:41
Square, Sine, and Triangle outputs into a 50 k Ω load.
25 kHz. 100 V/div, 10 us/div.

f) Jitter, Stability: OK

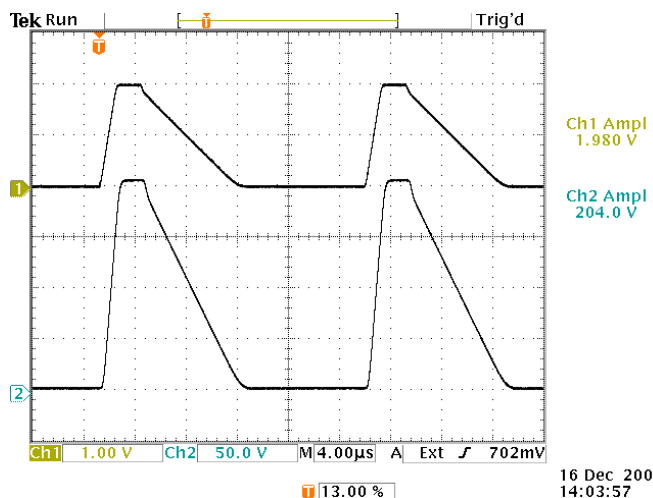

16 Dec 2003 14:03:57
EXT mode, maximum gain.
Top: +2V pulse in. 1V/div, 4 us/div.
Bottom: +200V pulse out. 50V/div, 4 us/div.

g) Prime Power: 120/240V AC, 50-60 Hz

References levels: 10%, 90%.