



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-155-PS-HW2-EA
S.N.: 10876
Date: January 23, 2004

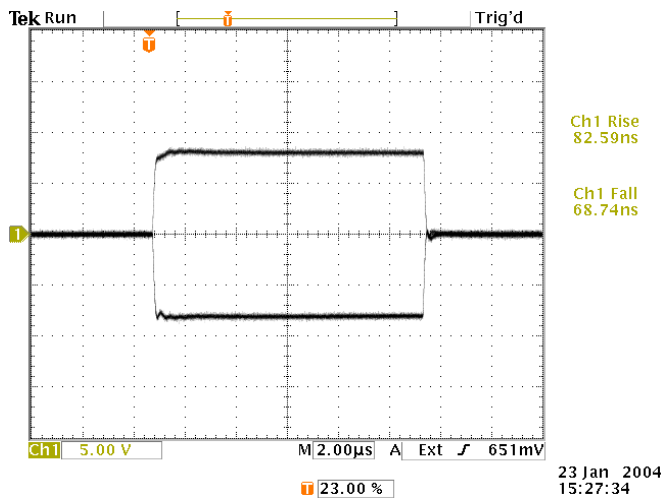

±4A into 2.0 Ohms. 5 V / div, 2 us / div.
250 V/div, 200 ns/div.

a) Output Signal Amplitude: 0 to ±4A
(0 to ±10V compliance)


b) Pulse Width: 1 us – 10 us

c) Rise Time: < 100 ns

d) Fall Time: < 100 ns

e) PRF: 0 – 100 Hz

f) Jitter, Stability: OK

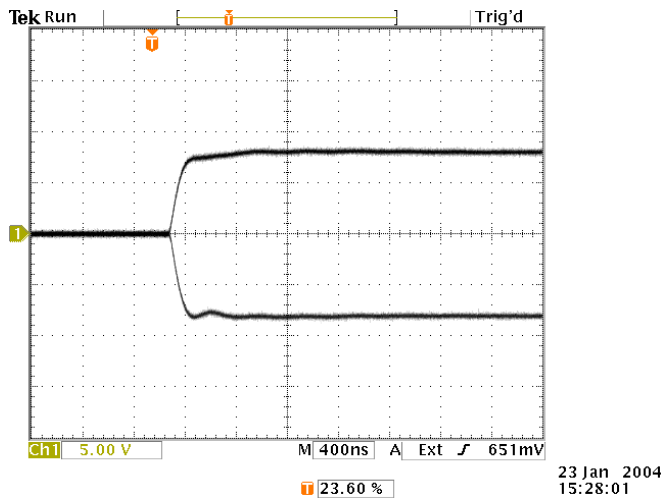

As above, but with 400 ns / div.

g) Prime Power: 120/240V AC, 50-60 Hz.

References levels: 20%, 80%.