



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802


PERFORMANCE CHECKSHEET

Model: AVOZ-A1A-B-PN-EA
S.N.: 10993
Date: September 16, 2004

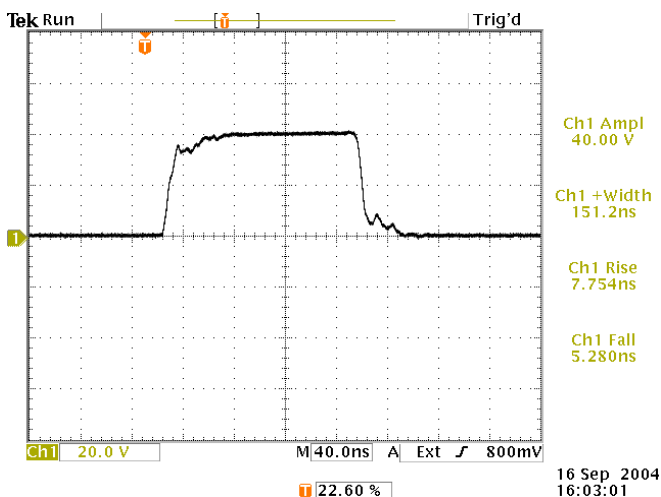

100 Hz, 150 ns, +40V into a 2Ω load.
20 V/div, 40 ns/div.

- a) Output Signal Amplitude: 0 to ±40V into 2Ω (0 to ±20A)
- b) Pulse Width (FWHM): 15 - 150 ns, 2% maximum duty cycle
- c) Rise Time (20%-80%): < 8 ns
- d) Fall Time (80%-20%): < 8 ns
- e) PRF: 1 Hz – 1 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V, 50-60 Hz.

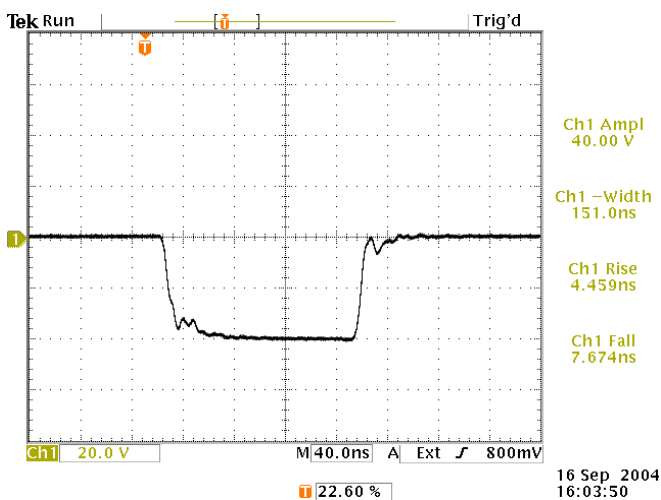

100 Hz, 150 ns, -40V into a 2Ω load.
20 V/div, 40 ns/div.

References levels: 20%, 80%.