



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AVX-MRB6
S.N.: 11031
Date: October 5, 2004

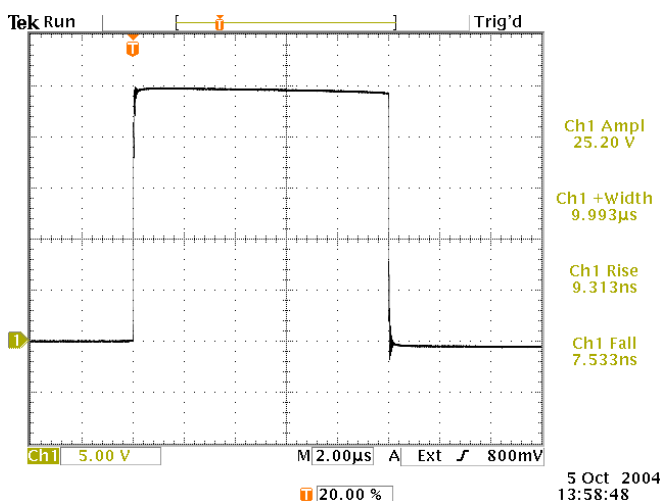

Output (shown): 10 us, +25V into a 3Ω load.
5V/div, 2us/div.

Input (not shown): 10 us, +100V
(from AV-1011-B, S/N 11030)

References levels: 20%, 80%.

a) Output Signal Amplitude: 0 to ±25V,
into 3 Ohms

b) Pulse Width: 10 us maximum

c) Rise Time (20%-80%): < 10 ns

d) Fall Time (80%-20%): < 10 ns

e) Function: current-quadrupling,
50-to-3 Ohm impedance matching
transformer.