



# AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS  
SINCE 1975


P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802

TEL: 1-800-265-6681  
FAX: 1-800-561-1970

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

## PERFORMANCE CHECKSHEET

Model: AVRH-2-B-P  
S.N.: 11036  
Date: October 28, 2004

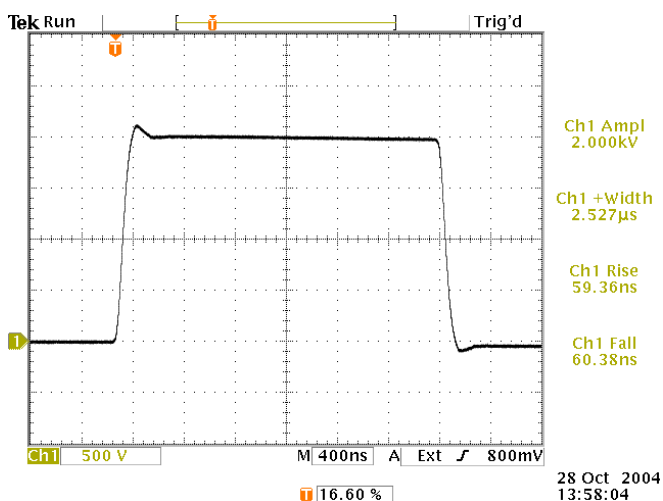

1 kHz, 2.5 us, +2000V into a 10 kΩ load.  
500 V/div, 400 ns/div.

References levels: 20%, 80%.

- a) Output Signal Amplitude: 0 to +2000V,  
to  $R \geq 10 \text{ k}\Omega$
- b) Pulse Width (FWHM) : 200 ns – 2.5 us,
- c) Rise Time (20%-80%): < 80 ns
- d) Fall Time (80%-20%): < 80 ns
- e) PRF: 1 Hz - 1 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.