



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802

TEL: 1-800-265-6681  
FAX: 1-800-561-1970


e-mail: [info@avtechpulse.com](mailto:info@avtechpulse.com)  
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET


Model: AV-1011-B-OT  
S.N.: 11047  
Date: November 23, 2004

Rise & Fall Time Test

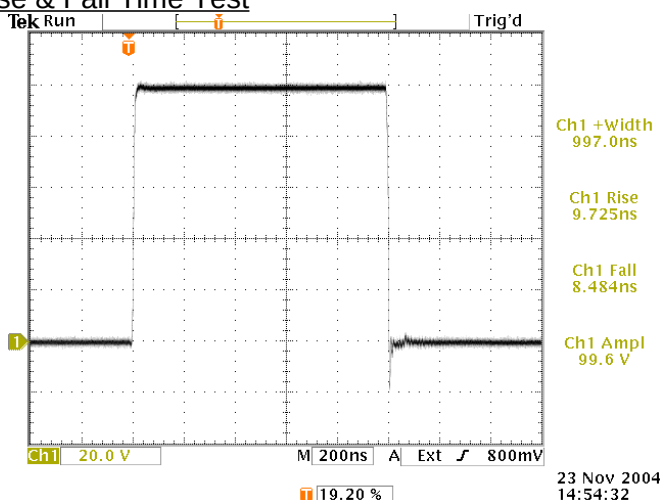

Output waveform (20V/div, 200ns/div) for: PRF=10 kHz, PW=1 us, AMPL=+100V, ZOUT=2Ω

Wide Pulse Test

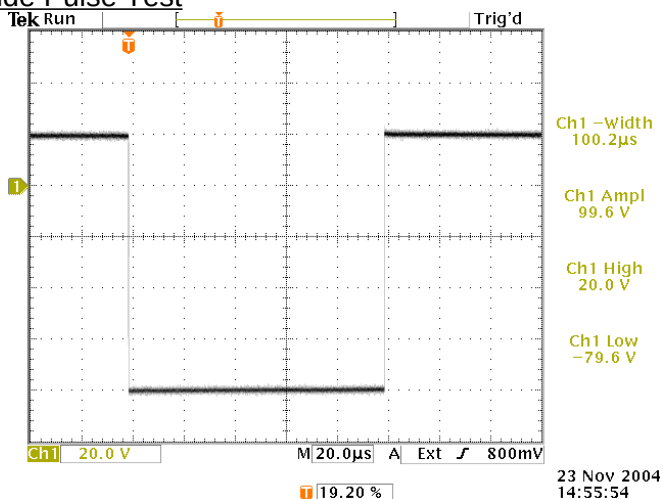

Output waveform (20V/div, 20us/div) for PRF=100 Hz, PW=100us, AMPL=-100V, OFFSET=+20V, ZOUT=2Ω.

References levels: 10%, 90%.

- a) Output Signal Amplitude: 0 to ±100V (R<sub>L</sub> ≥ 50Ω)
- b) Offset: 0 to ±20V (R<sub>L</sub> ≥ 50Ω)
- c) Pulse Width: 100 ns - 1 ms (10% max. duty cycle)
- d) Rise Time: ≤ 10 ns
- e) Fall Time: ≤ 10 ns
- f) PRF: 0 - 1 MHz
- g) Jitter, Stability: OK
- h) Prime Power: 100-240V AC, 50-60 Hz.