



□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802


TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802


PERFORMANCE CHECKSHEET

Model: AV-156A-B-P-ISIB  
S.N.: 11042  
Date: November 12, 2004

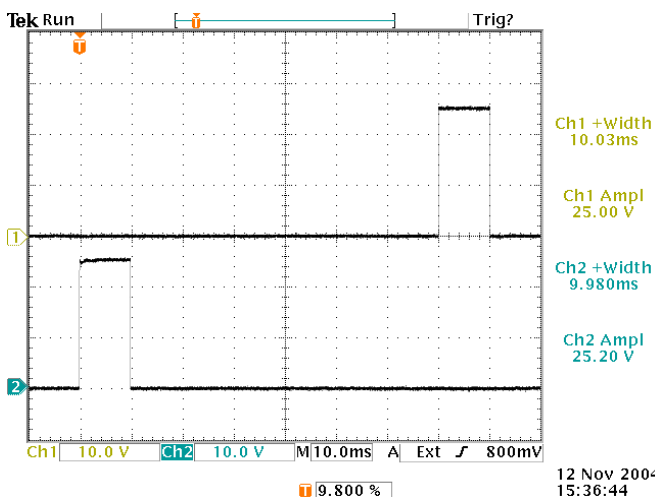

Top: OUT1, 5A into 5.0Ω load, 10 ms PW, 70 ms delay  
Bottom: OUT2, 5A into 5.0Ω load, 10 ms PW  
Both: 10 V/div, 10 ms/div, PRF = 1 Hz.

- a) Output Signal Amplitude: 0-5A
- b) Pulse Width: 1 - 10 ms
- c) Rise Time: < 10 us
- d) Fall Time: < 10 us
- e) PRF: 1 - 10 Hz
- f) Jitter, Stability: OK

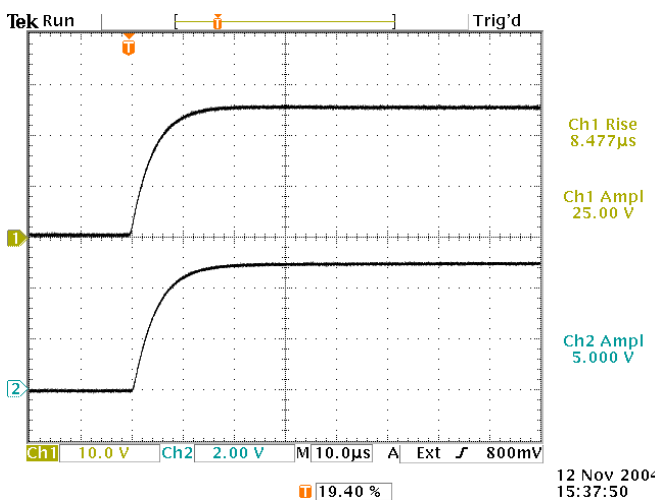

Top: OUT2, 5A into 5.0Ω load, 1 ms PW, 10 V/div.  
Bottom: MON2 into open circuit, 2V/div.  
Both: PRF = 10 Hz, 10 us/div.

- g) Prime Power: 100-240V, 50-60 Hz
- h) Inter-channel delay: 0 - 1000 ms

References levels: 10%, 90%.