



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-141K
S.N.: 11119
Date: February 4, 2005

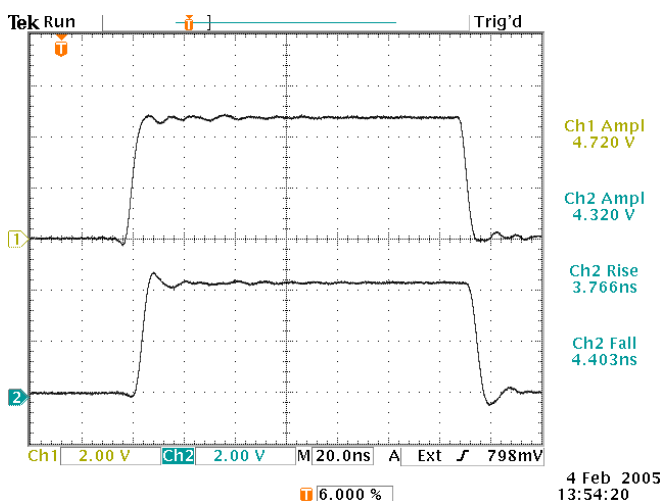

a) Output Signal Amplitude:
0 to $\pm 10V$, to 50 Ohms

b) Gain: unity gain

c) Rise Time (20%-80%): < 5 ns

d) Fall Time (20%-80%): < 5 ns

e) Bandwidth: 75 MHz

f) Jitter, Stability: OK

g) Prime Power: +/- 24V, 300 mA

Top: TTL-level input pulse (+4.7V approx.)

Bottom: OUT into 50 Ω , 2 V/div, 20 ns/div

References levels: 10%, 90%.