



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802

TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: *AVO-9A-C-P-P2-1NFA*

S.N.: *11126*

Date: *FEB 11 2005*

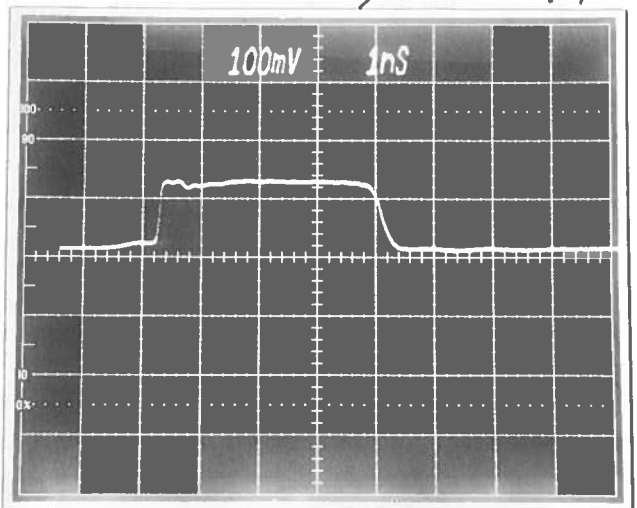

a) Output Signal Amplitude:

*0 TO +150 mA*

b) Pulse Width:

*0.4 TO 4.0 NS*

c) Rise Time (20%-80%):

*≤ 200 ps*

d) Fall Time (80%-20%):


*≤ 200 ps*

ⓐ 40 dB ATTN.: 10 V/DIV

MANIPULATE OUT TO 50 Ω, NO AMX-S-1 UNIT

e) PRF:

*0 TO 1.0 MHz*

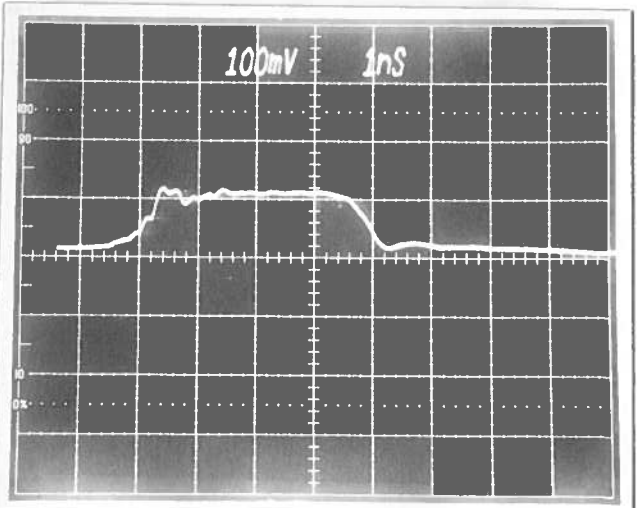

f) Jitter, Stability:

*OK*

g) Prime Power:

*100 - 240 Volts  
50 - 60 kHz*

ⓑ AS ⓐ BUT AMX-S-1 INSTALLED

*ME OUT TO 20 Ω  
1N4594 DIODE IN SERIES WITH  
20 OHM 1/500 AS TEST LOAD.*

*PRF = 100 KHz.*