



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-110C-PS
S.N.: 11218
Date: June 22, 2005

Rise / Fall Time Test

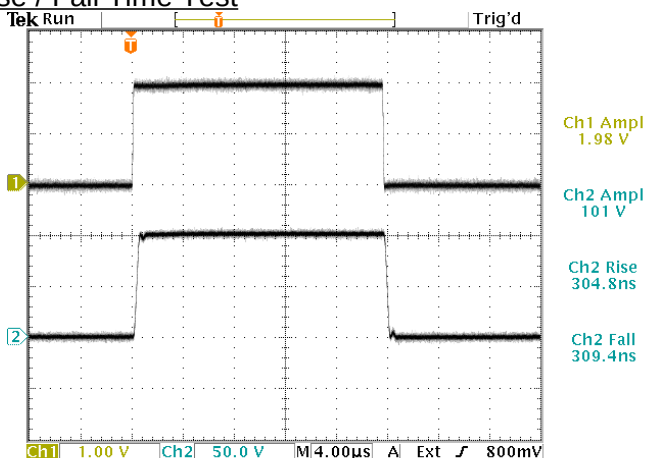

Top: +2V input, 1 V/div, 4 us/div.
Bottom: +100V output, 10 kΩ load. 50 V/div, 4 us/div.

a) Output Signal Amplitude: 0 to ±100V,
to R ≥ 10 kΩ

b) Gain: ×1 to ×50

c) Rise Time: < 0.6 us


d) Fall Time: < 0.6 us

e) Bandwidth: 200 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

Arbitrary Input Test

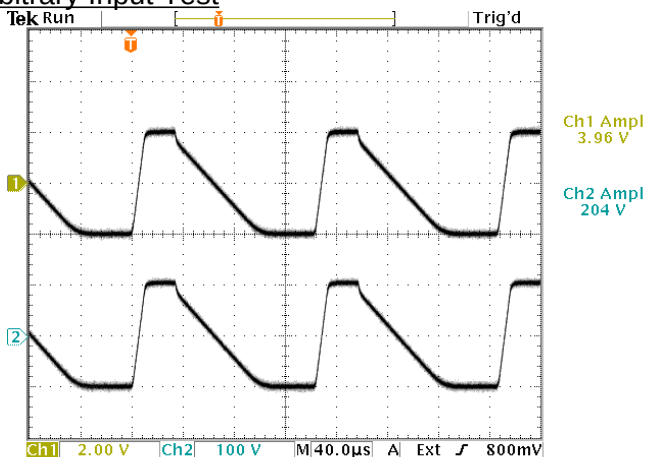

Top: ±2V input, 2 V/div, 40 us/div.
Bottom: ±100V output, 10 kΩ load. 100 V/div, 40 us/div.

References levels: 10%, 90%.