



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802


TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: [info@avtechpulse.com](mailto:info@avtechpulse.com)  
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-141J  
S.N.: 11243  
Date: August 2, 2005

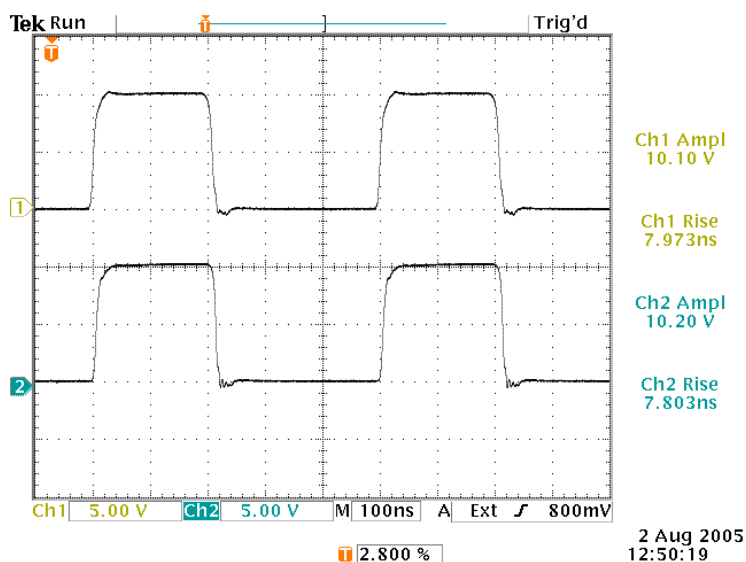

2 Aug 2005  
12:50:19

a) Output Signal Amplitude:  
0 to  $\pm 10V$ , to 50 Ohms

b) Gain: +1, fixed

c) Rise Time (20%-80%): < 10 ns

d) Fall Time (20%-80%): < 10 ns

e) Bandwidth: 50 MHz

f) Jitter, Stability: OK

g) Prime Power: +/- 24V, 200 mA

Top: IN, +10V pulse.

Bottom: OUT into 50 $\Omega$ , 5 V/div, 100 ns/div

References levels: 20%, 80%.