



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802


TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: [info@avtechpulse.com](mailto:info@avtechpulse.com)  
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AVOZ-D2-B  
S.N.: 11398  
Date: February 2, 2006

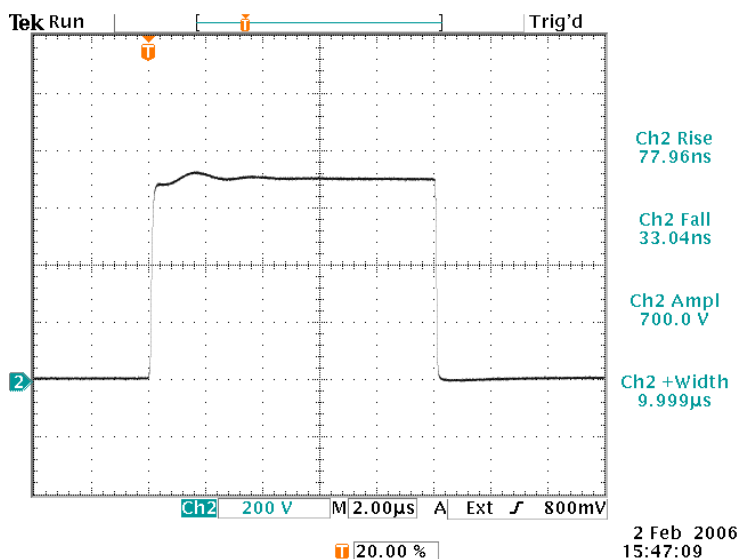

a) Output Signal Amplitude: 0 to +700V

b) Pulse Width (FWHM): 200 ns - 10 us,  
0.05% duty cycle

c) Rise Time (20%-80%): < 100 ns

d) Fall Time (20%-80%): < 100 ns

e) PRF: 1 Hz – 2.5 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

50 Hz, 10 us, +700V into a 10Ω load, connected using the AVOZ-D2-T output module and five coaxial cables.

200 V/div, 2 us/div.

References levels: 20%, 80%.