



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (315) 883-1328


TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: [info@avtechpulse.com](mailto:info@avtechpulse.com)  
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 686-6679

PERFORMANCE CHECKSHEET

Model: AV-107C-B-P  
S.N.: 11408  
Date: December 6, 2005

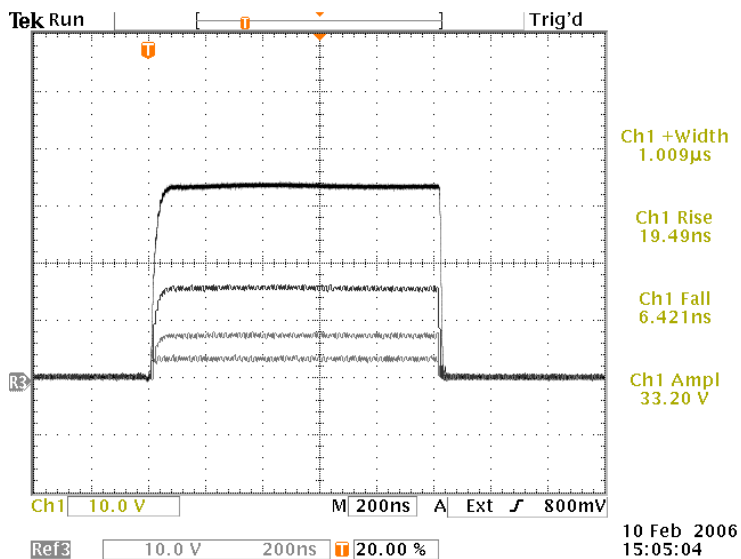

100 Hz, 1 us, +1A, +2.5A, +5A and +10A  
into a 3.30Ω load. 10 V/div, 200 ns/div.

References levels: 20%, 80%.

- a) Output Signal Amplitude: 0 to +10A
- b) Pulse Width (FWHM): 100 ns – 1 us
- c) Rise Time (20%-80%): < 20 ns
- d) Fall Time (80%-20%): < 20 ns
- e) PRF: 1 Hz - 5000 Hz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.