



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVRZ-5W-B-PN
Type: High-Speed, High-Voltage Pulse Generator
S.N.: 11416 (upgrade)
Date: November 7, 2006


Rise/Fall Time Test

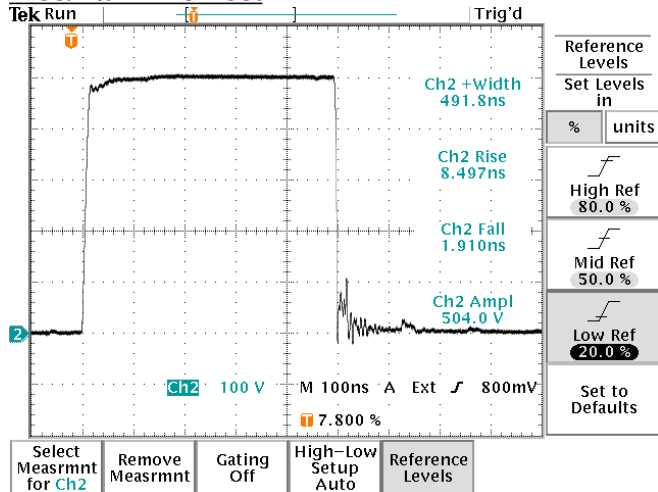

+500V, 50Ω load, PW = 500 ns.
100 V/div, 100 ns/div.

- a) Output Signal Amplitude: 0 to +500V, to 50Ω
- b) Pulse Width: 15 ns - 10 us, 0.1% duty cycle
- c) Rise Time (20%-80%): < 10 ns (positive output)
- d) Fall Time (80%-20%): < 5 ns (positive output)
- e) PRF: 1 Hz - 5 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz


Maximum Duty Cycle Test

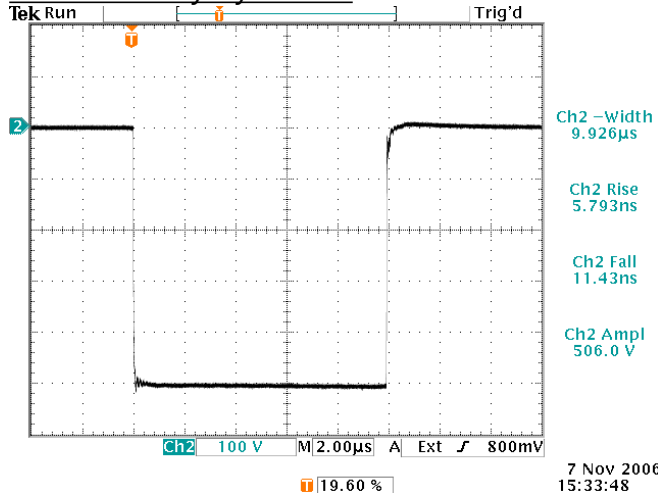

-500V, 50Ω load, PW = 10 us, PRF = 100 Hz.
100 V/div, 2 us/div.

Reference levels: 20%, 80%.

Short Circuit Test

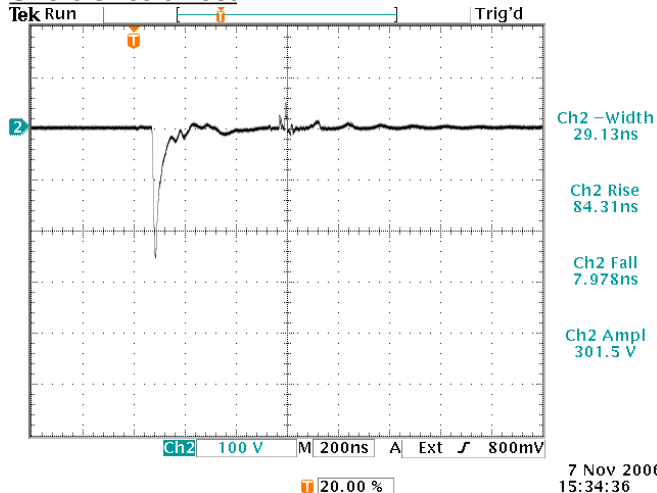

500 ns, -500V into a 50Ω load shorted with a 12" length of patch cord. 100 V/div, 100 ns/div.