



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (315) 883-1328

TEL: 1-800-265-6681  
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 686-6679

PERFORMANCE CHECKSHEET

Model: AVRZ-5W-B  
S.N.: 11416  
Date: February 21, 2006


Rise/Fall Time Test

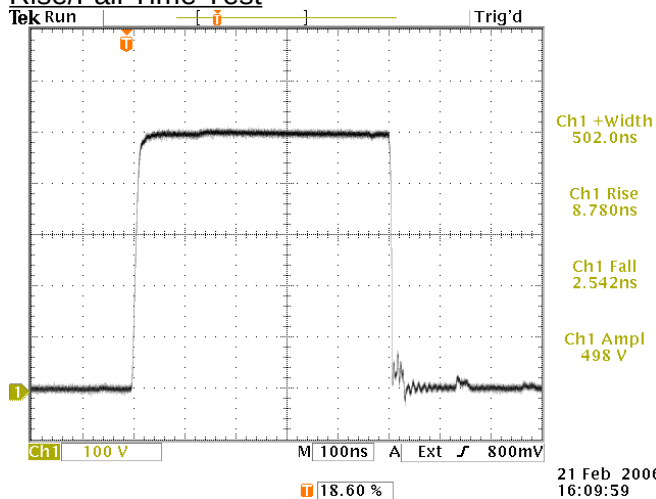

+500V, 50Ω load, PW = 500 ns.  
100 V/div, 100 ns/div.

- a) Output Signal Amplitude: 0 to +500V, to 50Ω
- b) Pulse Width: 15 ns - 10 us, 0.1% duty cycle
- c) Rise Time (20%-80%): < 10 ns
- d) Fall Time (80%-20%): < 5 ns
- e) PRF: 1 Hz - 5 kHz
- f) Jitter, Stability: OK


Maximum Duty Cycle Test

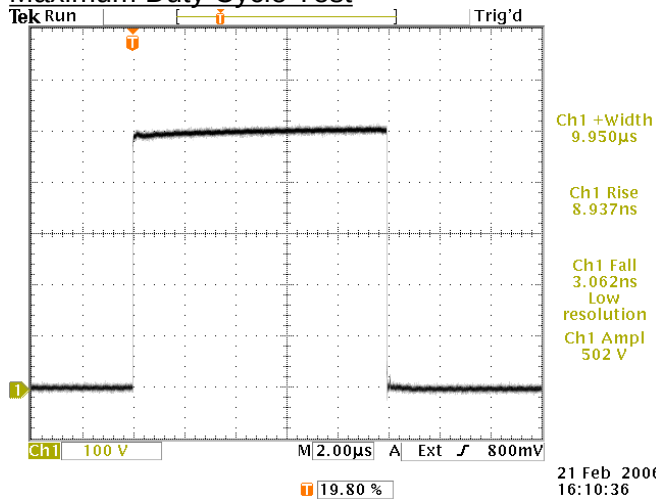

+500V, 50Ω load, PW = 10 us, PRF = 100 Hz.  
100 V/div, 2 us/div.

Reference levels: 20%, 80%.

Short Circuit Test

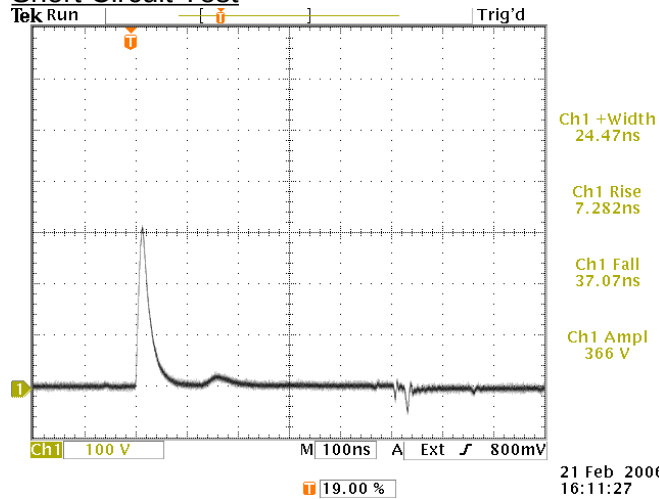

500 ns, +500V into a 50Ω load shorted with a 12" length of patch cord. 100 V/div, 100 ns/div.