



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (315) 883-1328

TEL: 1-800-265-6681  
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-1021-B  
S.N.: 11451  
Date: April 3, 2006


Rise/Fall Time Test

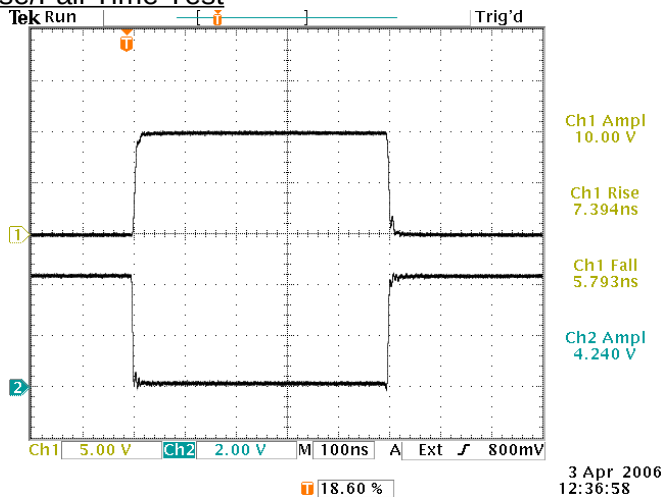

Top: OUT, +10V amplitude, 0V offset, into 50Ω. 5 V/div.  
Bottom: Logic complement, TTL, into 50Ω. 2 V/div.  
Both: 100 ns/div.

- a) Output Signal Amplitude: 0 to ±10V
- b) Pulse Width (FWHM): 20 ns - 500 ms
- c) Rise Time (20%-80%): < 10 ns
- d) Fall Time (80%-20%): < 10 ns
- e) PRF: 1 Hz - 10 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

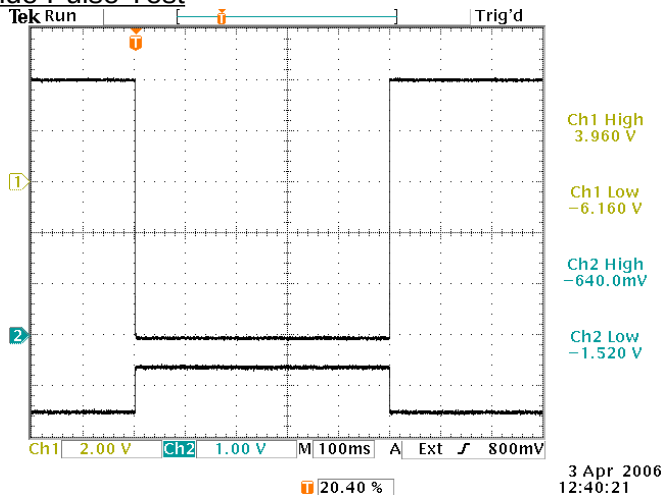

Top: OUT, -10V ampl., +4V offset, into 50Ω, 2V/div  
Bottom: Logic, ECL, into 50Ω, 1V/div  
Both: Frequency 1 Hz, 100 ms/div

References levels: 10%, 90%.