



# AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS  
SINCE 1975

□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (315) 883-1328

TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: [info@avtechpulse.com](mailto:info@avtechpulse.com)  
<http://www.avtechpulse.com/>

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

## PERFORMANCE CHECKSHEET

Model: AVMP-4-B-PN  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 11524  
Date: June 7, 2006

Output Amplitude: 0 to ±10V, to 50Ω  
Pulse Width (FWHM): 10 ns – 10 μs  
Rise Time (20%-80%): ≤ 200 ps  
Fall Time (80%-20%): ≤ 200 ps  
PRF: 1 Hz - 1 MHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →


### Test Waveforms

Leading edge at 10 kHz, 100 ns, +10V,

1 ns/div. 5 V/div (50 mV × 40 dB):


Trailing edge at 10 kHz, 100 ns, +10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

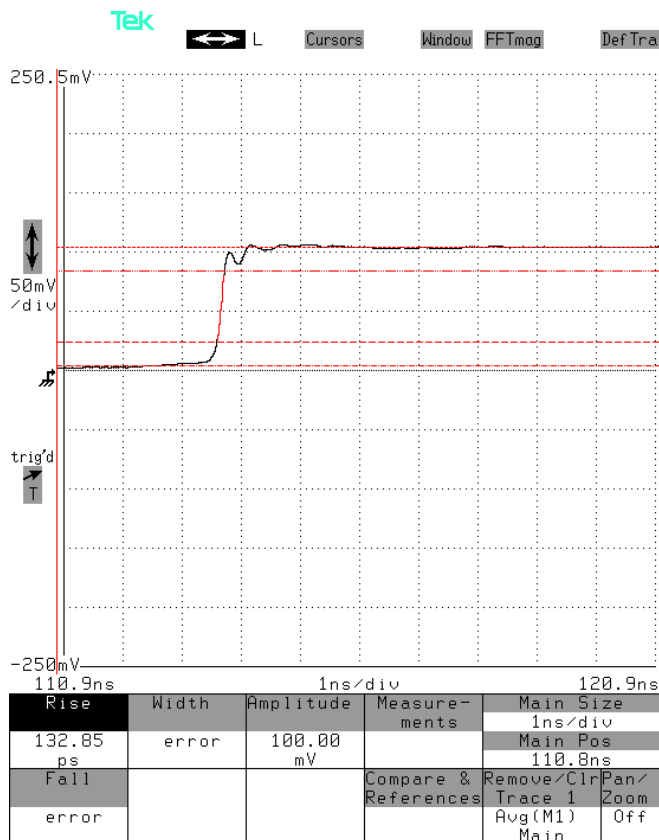

Full pulse at 1 kHz, 10 us, -10V,

2 us/div. 5 V/div (50 mV × 40 dB):

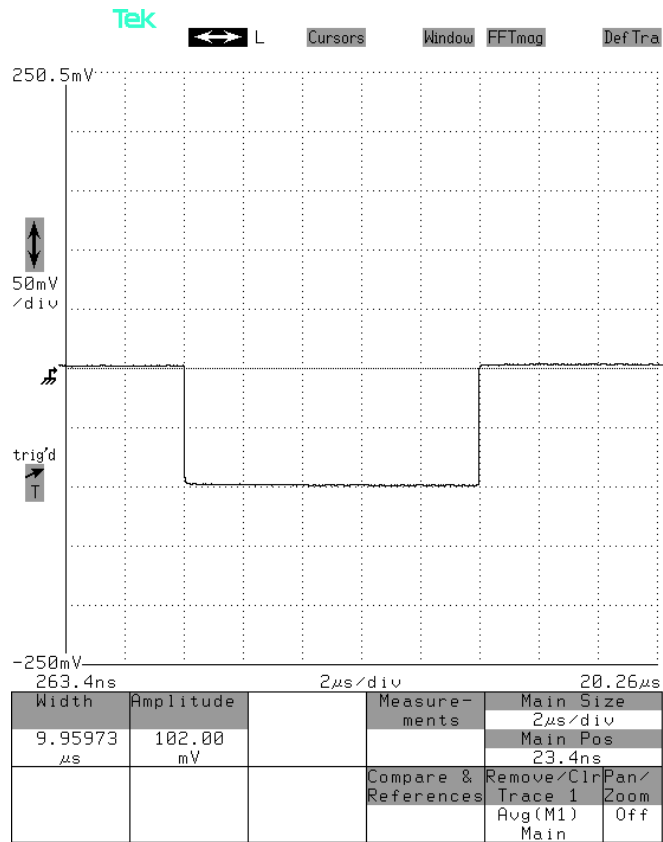

Leading edge at 10 kHz, 1 us, -10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

