



□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-1011B1-B-TNT-R5  
Type: High-Speed Pulse Generator  
S.N.: 11568  
Date: September 13, 2006

Output Amplitude: 0 to ±100V, to 50Ω  
Pulse Width (FWHM): 100 ns – 1 ms  
Rise Time (20%-80%): ≤ 2 ns  
Fall Time (80%-20%): ≤ 2 ns  
PRF: 1 Hz – 100 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

10 kHz, +100V, 100 ns, to 50 Ohms,

10 kHz, -100V, 100 ns, to 50 Ohms,


20 ns/div. 50 V/div (50 mV × 60 dB):

20 ns/div. 50 V/div (50 mV × 60 dB):

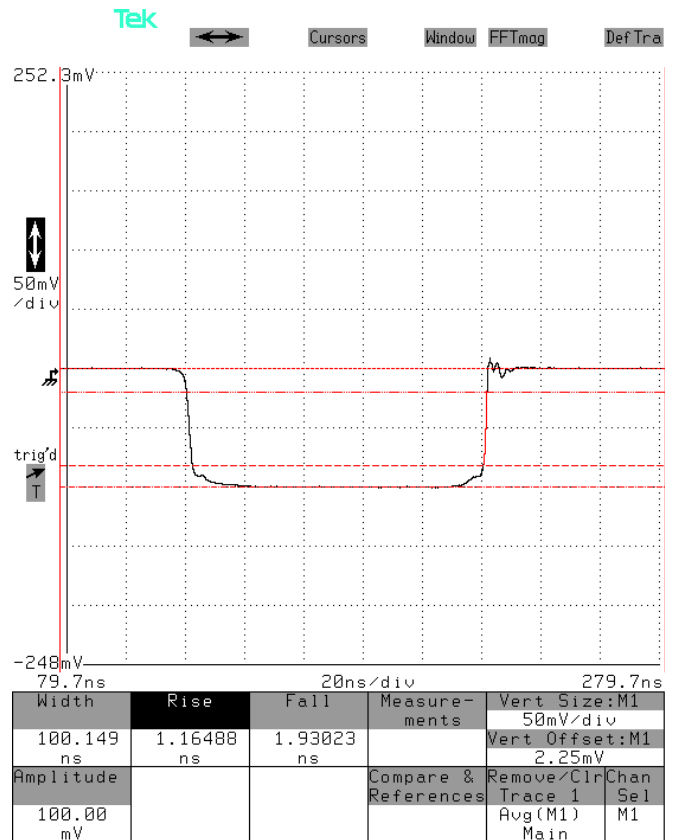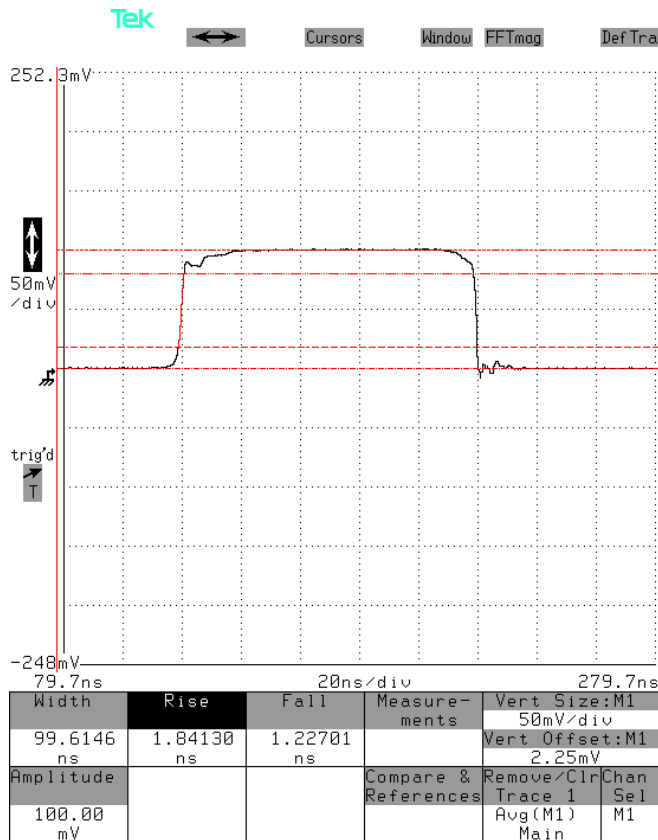

10 Hz, +100V, 1 ms, to 50 Ohms,

200 us/div. 50 V/div:

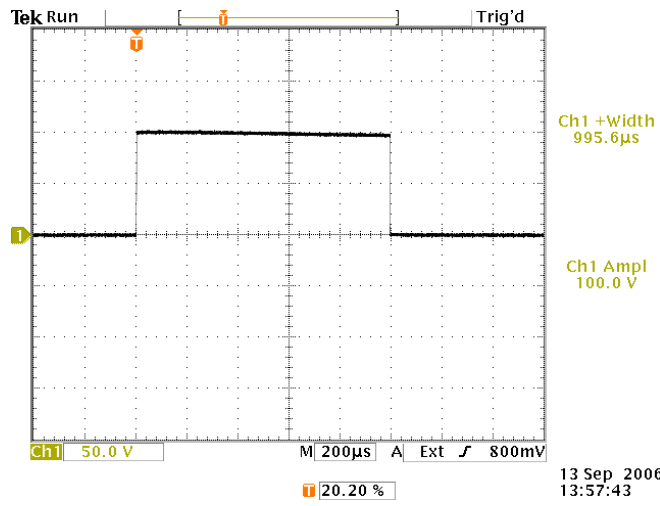

10 Hz, -100V, 1 ms, to 50 Ohms,

200 us/div. 50 V/div:

