



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-135B
Type: High-Speed Amplifier
S.N.: 11682
Date: February 8, 2007

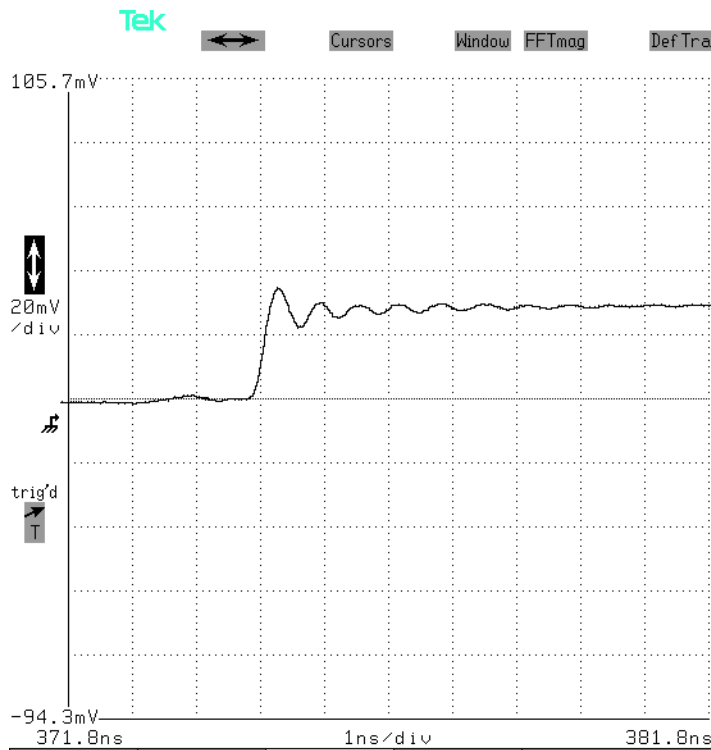

Rise	Amplitude	Measurements	Vert Size:M1
184.47 ps	29.600 mV		20mV/div
		Compare & References	Vert Offset:M1
			5.75mV
		Remove/Clear	Chan Sel
		Trace 1	M1
		Avg (M1)	
		Main	

a) Output Signal Amplitude:
0 to 1V, to 50 Ohms

b) Gain: 34 dB

c) Rise Time (20%-80%): < 0.3 ns

d) Fall Time (20%-80%): < 0.3 ns

e) Bandwidth: 2500 MHz

f) Jitter, Stability: OK

g) Prime Power: +15V DC

~ 0.3V output into 50 Ohms.
1 ns/div. 200 mV/div (20 mV × 20 dB).

References levels: 20%, 80%.