



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET


Model: AVR-EB4-B-MSCLA  
Type: Semiconductor Device Tester  
S.N.: 11809  
Date: July 20, 2007

Output Amplitude: to +4A, -4A  
Pulse Width (FWHM): 100 us – 1 ms  
Switching Time,  
+ to -, 20%-80%: ≤ 50 ns  
PRF: 1 - 10 Hz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms

With a Microsemi UM2106B installed in the AVX-TRRA test jig:

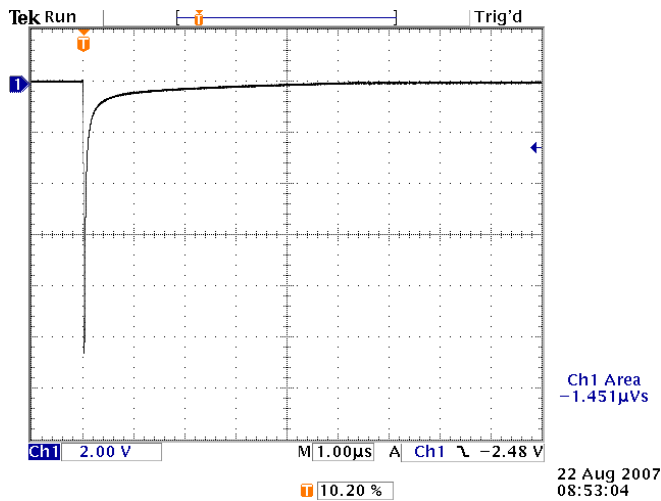


AMP1 = +10 mA, AMP2 = -200V

2 V/div (0.4 A/div), 1 us/div.

Corresponds to a lifetime of 29.0 us (see “Typical Results” section of the manual for discussion).

With a Microsemi UM7102B installed in the AVX-TRRA test jig:

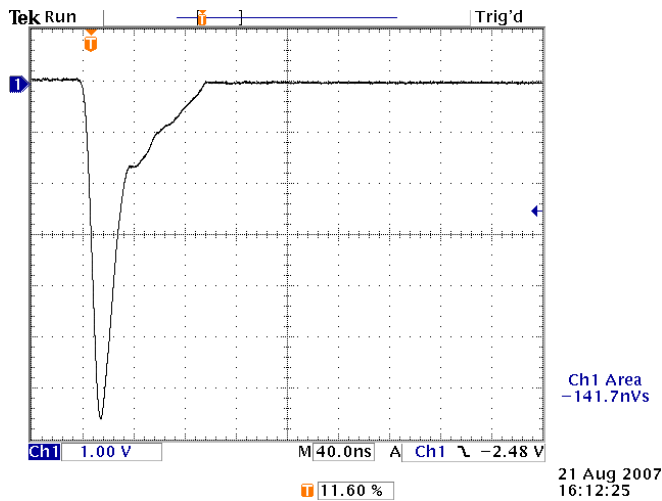

AMP1 = +10 mA, AMP2 = -200V

1 V/div (0.2 A/div), 40 ns/div.

Corresponds to a lifetime of 2.8 us (see “Typical Results” section of the manual for discussion).