



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-A-1-PW-B-EA-UC2-P
Type: Pulse Generator
S.N.: 11877
Date: December 7, 2007

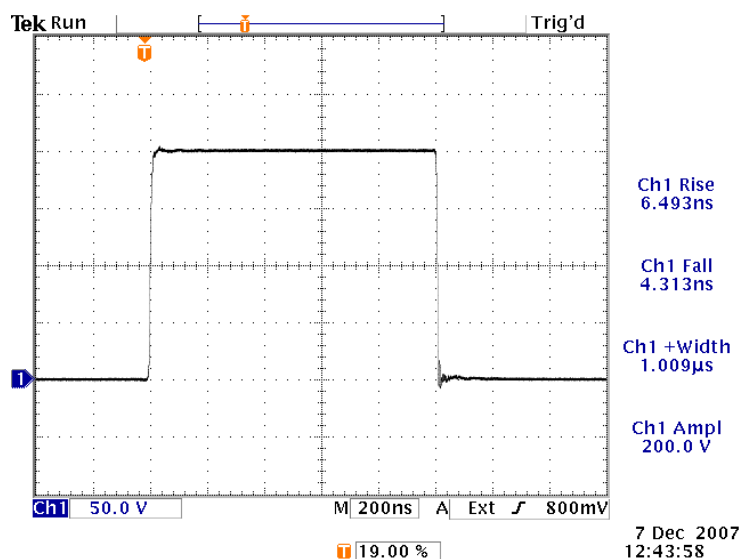

+200V, 1 us, 5 kHz, into 50Ω.
50 V/div, 200 ns/div.

- a) Output Signal Amplitude: 0 to +200V, to 50 Ohms
- b) Pulse Width (FWHM): 20 ns – 1 us
- c) Rise Time (20%-80%): < 10 ns
- d) Fall Time (80%-20%): < 10 ns
- e) PRF: 1 Hz - 100 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

References levels: 20%, 80%.