



□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVMP-4-B-AK1-PN  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 12094  
Date: October 21, 2008

Output Amplitude: 0 to ±10V, to 50Ω  
Pulse Width (FWHM): 10 ns – 10 μs  
Rise Time (20%-80%): ≤ 200 ps  
Fall Time (80%-20%): ≤ 200 ps  
PRF: 1 Hz - 1 MHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Leading edge at 10 kHz, 100 ns, +10V,

Trailing edge at 10 kHz, 100 ns, +10V,


1 ns/div. 5 V/div (50 mV × 40 dB):

1 ns/div. 5 V/div (50 mV × 40 dB):

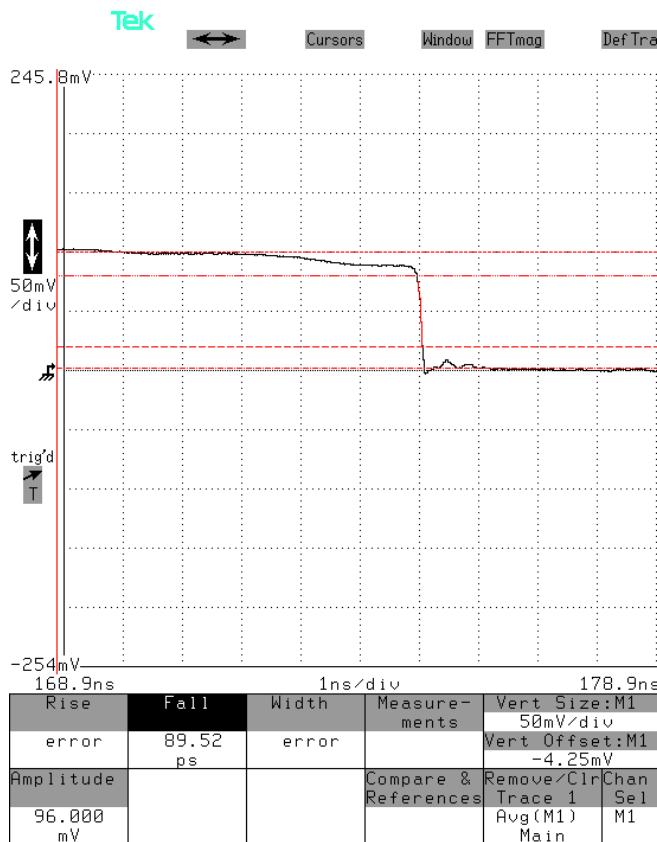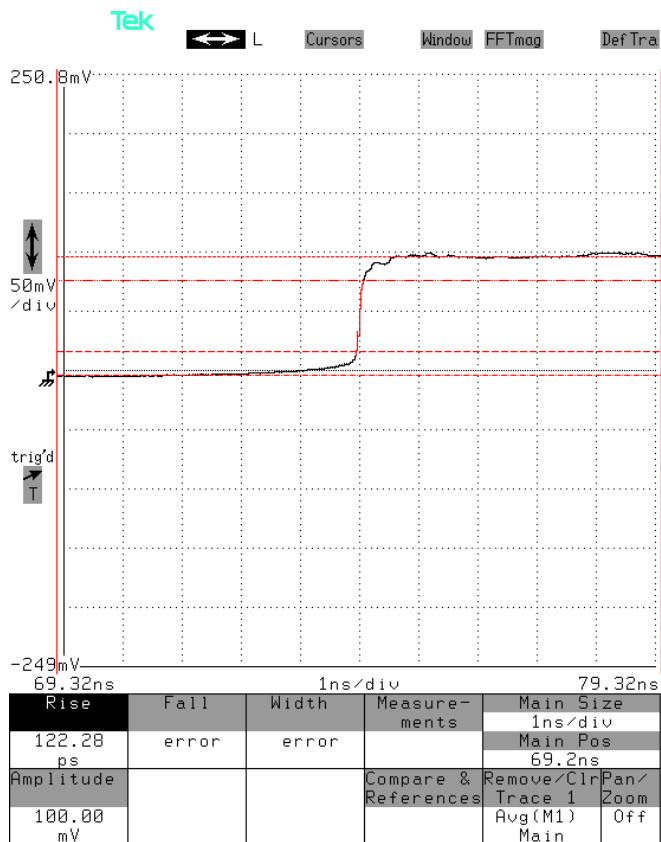


Full pulse at 5 kHz, 10 us, -10V,

2 us/div. 5 V/div (50 mV × 40 dB):

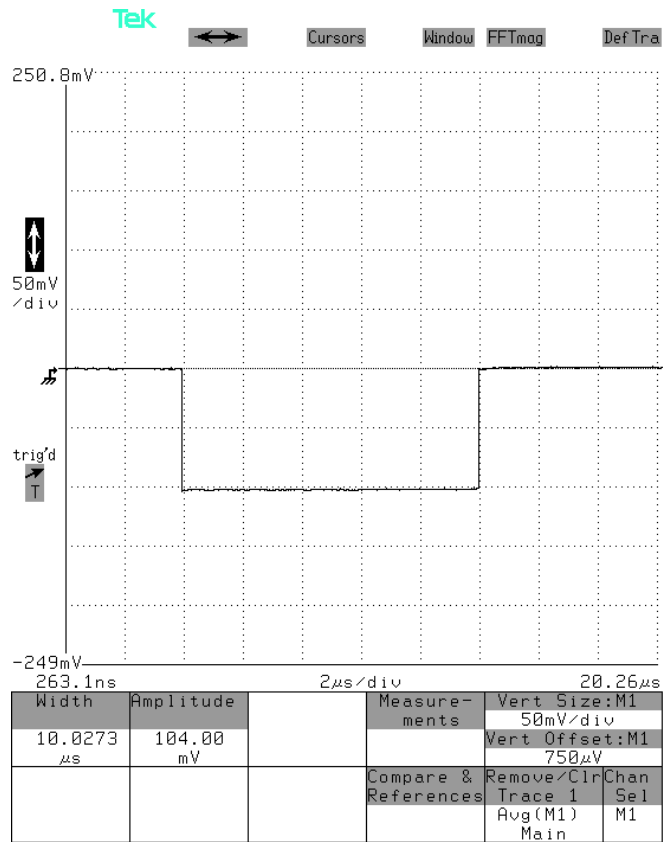


Leading edge at 5 kHz, 10 us, -10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

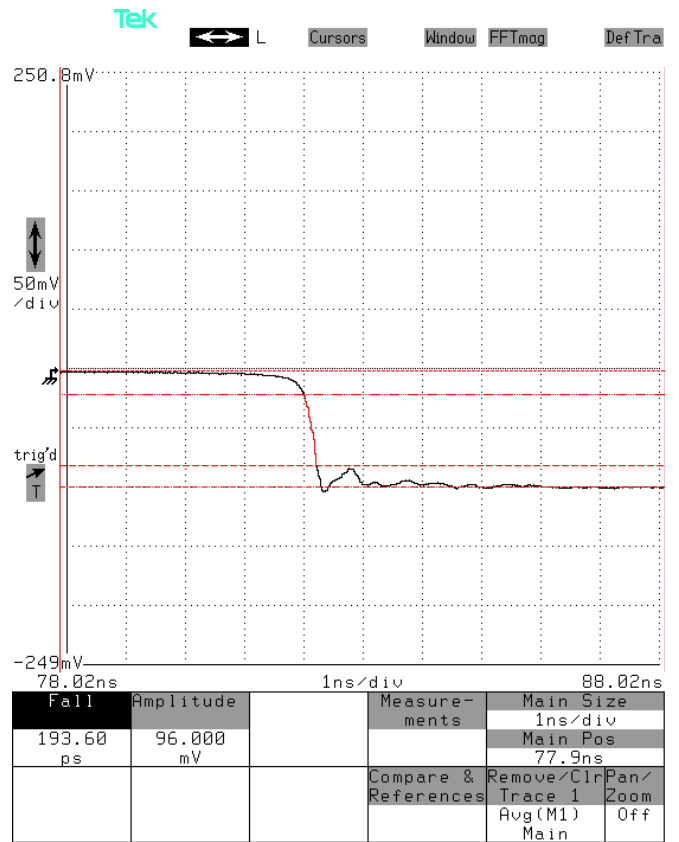

Trailing edge at 10 kHz, 500 ns, -10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

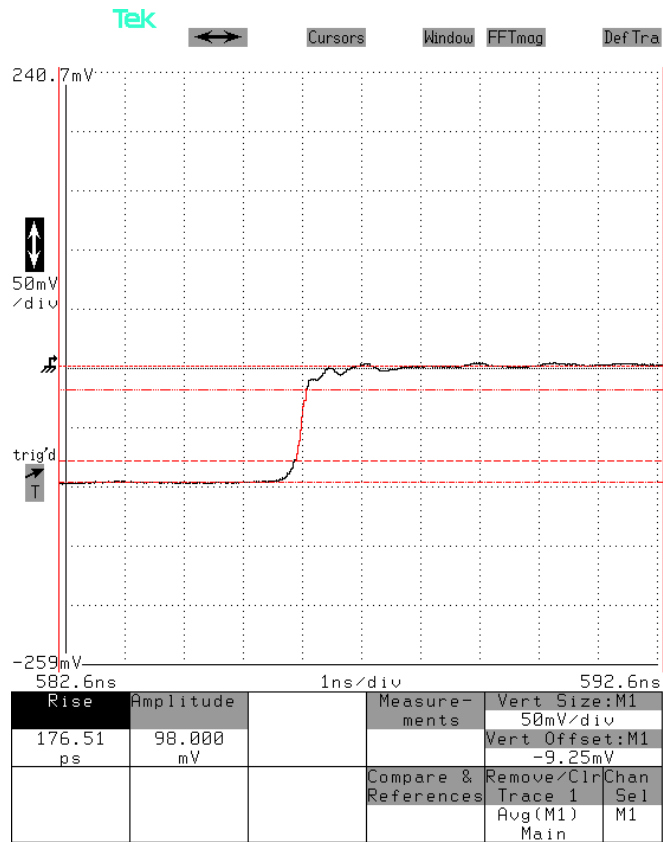

Trailing edge at 5 kHz, 1 us, +10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

