



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-107C-B-P-PW1
Type: Pulsed Laser Diode Driver
S.N.: 12264
Date: July 8, 2010


Rise & Fall Time Test

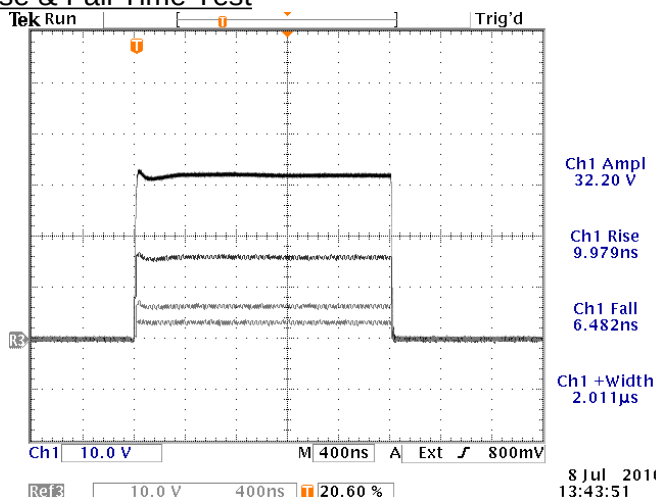

+1A, +2A, +5A, +10A into a 0.32 Ohm load installed on the rear panel. 2 us pulse width. 10 V/div, 400 ns/div.

- a) Output Signal Amplitude: 0 to +10A
- b) Pulse Width (FWHM): 100 ns to 20 us
- c) Rise Time (20%-80%): < 20 ns
- d) Fall Time (80%-20%): < 20 ns
- e) PRF: 1 Hz – 5 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

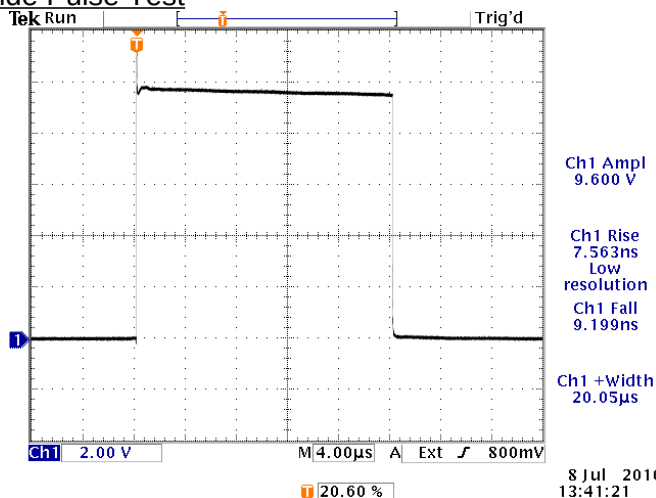

+10A into the supplied AV-CTL1-ENC test load (0.96 Ohms). 20 us pulse width. 2 V/div, 4 us/div.

References levels: 20%, 80%.