



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-8A1-B-P-AK4-AK6  
Type: High-Current Pulsed-Voltage Laser Diode Driver  
S.N.: 12353  
Date: November 24, 2009


Rise & Fall Time Test

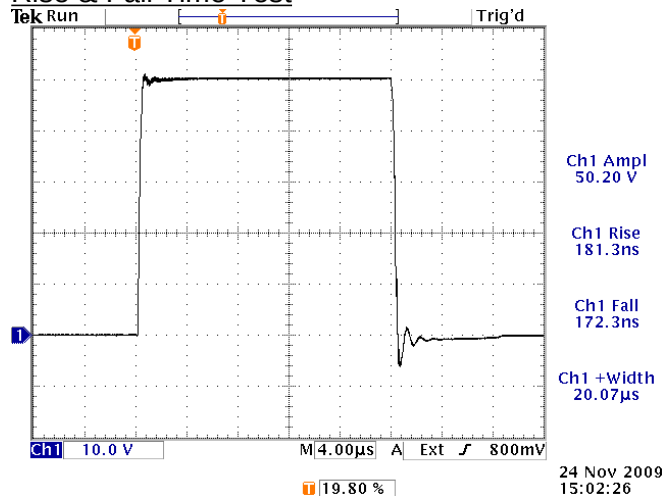

10 Hz, 20 us, +50V into a 1Ω load (the supplied AV-CTL1 accessory). 10 V/div, 4 us/div.

- a) Output Signal Amplitude: 0 to +50V, to 1Ω
- b) Pulse Width (FWHM): 2 us - 1 s
- c) Rise Time (20%-80%): < 0.5 us
- d) Fall Time (20%-80%): < 0.5 us
- e) PRF: 1 Hz - 1 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

High Duty Cycle Test

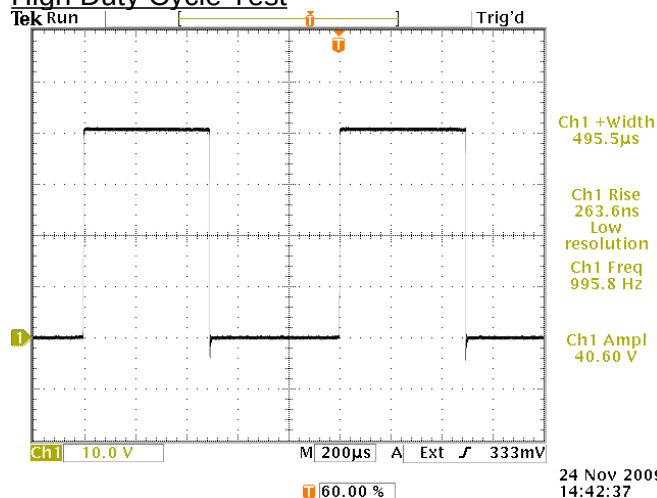

1 kHz, 500 us, +40V into a 1Ω load (AV-HTL-1R0, S/N 12354). 10 V/div, 200 us/div.

References levels: 20%, 80%.