



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-E2-B-P-TEK1C  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 12550  
Date: September 8, 2017



Output Amplitude: +10 to +50V, into 50Ω  
Pulse Width (FWHM): 50 – 200 ns  
Rise Time (10%-90%): > 0.6 but < 1.0 ns  
Fall Time (90%-10%): > 0.6 but < 2.0 ns  
PRF: 1 Hz - 100 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →


Test Waveforms

Full pulse at 10 kHz, 50 ns, +50V,  
10 ns/div. 10 V/div (100 mV/div × 40 dB):


Full pulse at 10 kHz, 200 ns, +50V,  
10 ns/div. 10 V/div (100 mV/div × 40 dB):

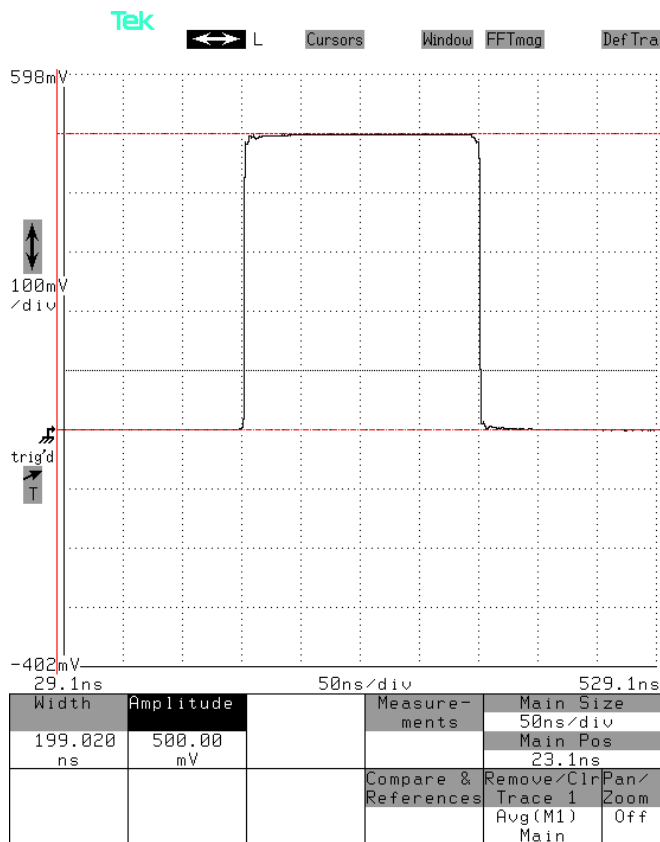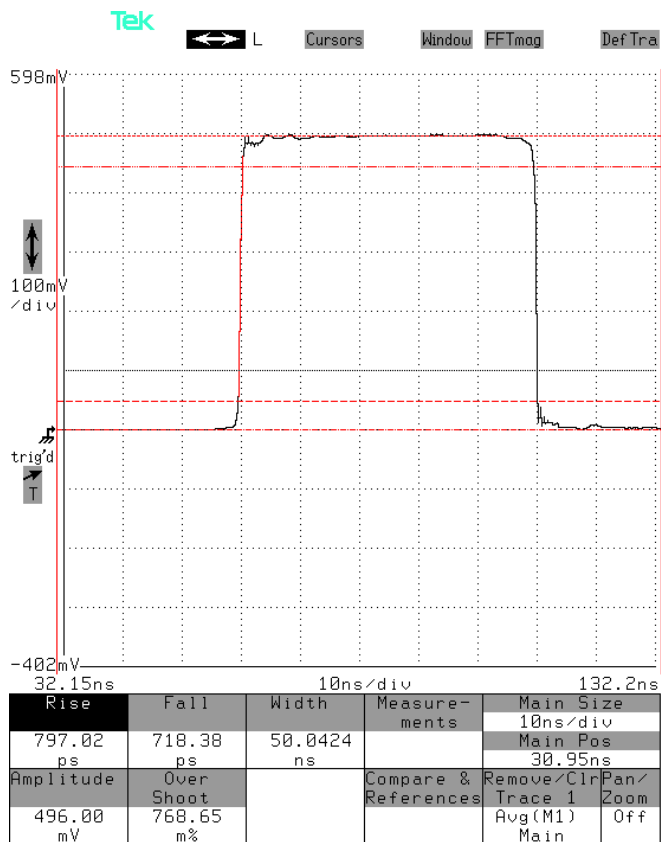

Leading edge at 10 kHz, 200 ns, +50V,  
5 ns/div. 10 V/div (100 mV/div × 40 dB):

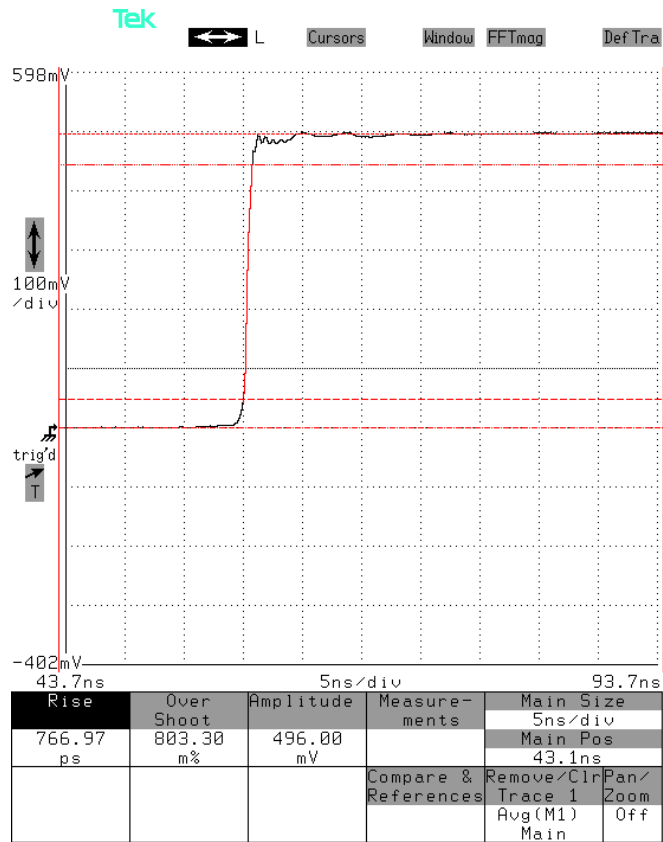

Trailing edge at 10 kHz, 200 ns, +50V,  
5 ns/div. 10 V/div (100 mV/div × 40 dB):

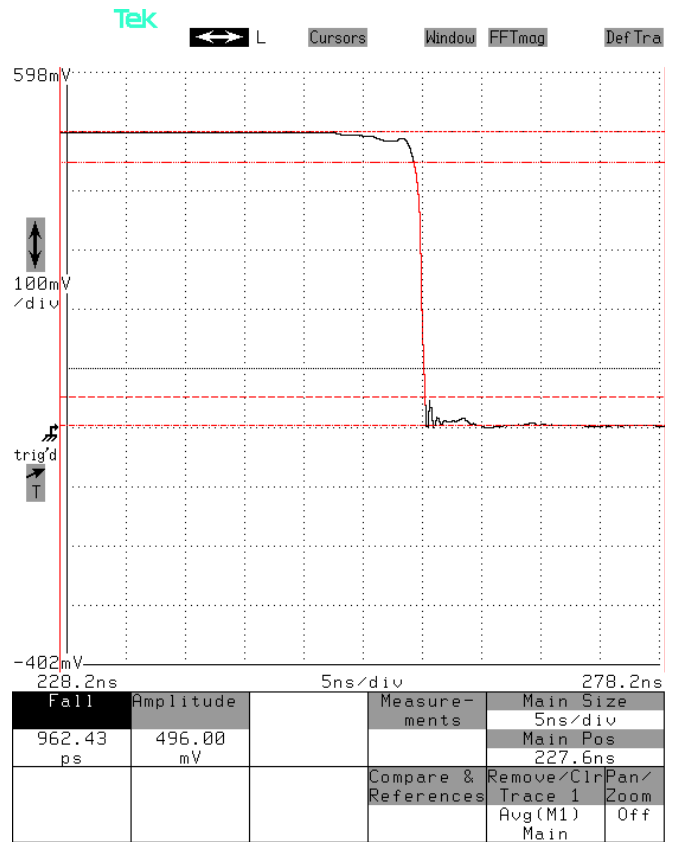

Pulse top aberrations at maximum amplitude (+50V): < +/-5% within the first 20 ns and last 12 ns of the pulse, and < +/-2% for the remaining middle portion of the pulse.