



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-107D-B-AC03-M-P  
Type: High-Speed, High-Current Laser Diode Driver  
S.N.: 12662  
Date: May 26, 2011

Positive Test

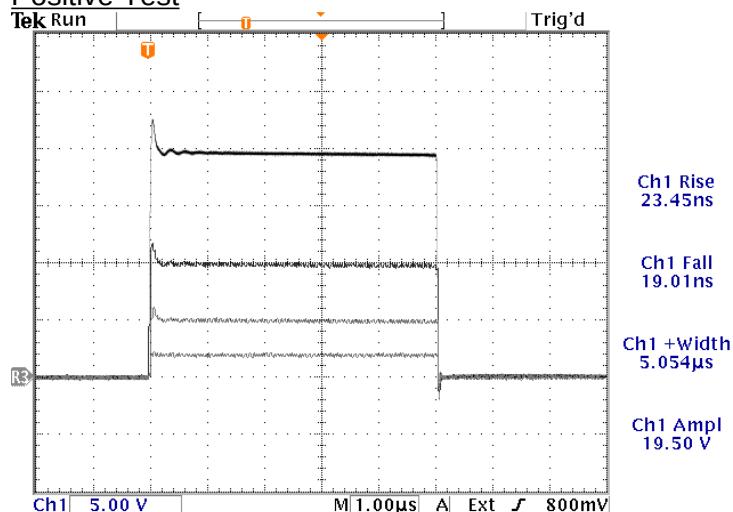

26 May 2011  
14:06:37

Ref3 5.00 V 1.00µs 19.60 %  
+2A, +5A, +10A and +20A into a 0.978Ω load  
(consisting of the AV-CTL1-ENC connectorized test  
load installed on the end of the AV-CLZ1-100  
transmission line cable assembly).

100 Hz, 5 us pulse width.  
5 V/div, 1 us/div.

- a) Output Signal Amplitude: 0 to +20A
- b) Pulse Width (FWHM): 50 ns – 5 us
- c) Rise Time (20%-80%): < 30 ns
- d) Fall Time (80%-20%): < 30 ns
- e) PRF: 1 Hz - 500 Hz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

References levels: 20%, 80%.