



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVX-FD2-PS  
Type: Frequency Divider  
S.N.: 12751  
Date: December 7, 2011


Division Test

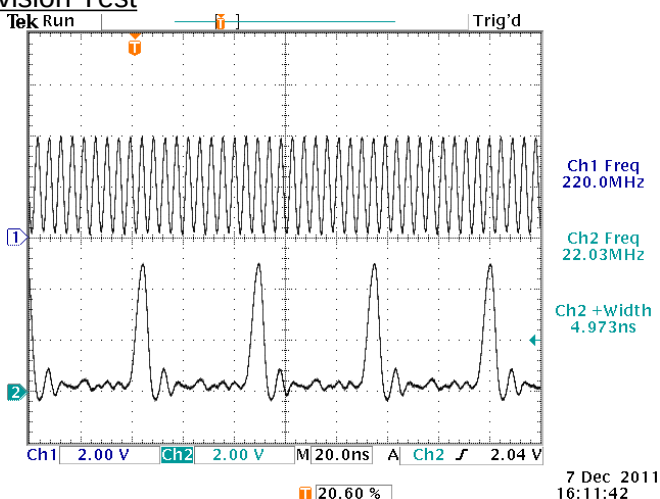

Top: TTL input, 220 MHz, 50Ω R<sub>IN</sub>.  
Bottom: TTL output, ÷10, 5 ns pulse width, 50Ω load.  
Both: 2V/div, 20 ns/div.

- a) Output Signal Amplitude: TTL, R<sub>L</sub> ≥ 50Ω
- b) Pulse Width: 5 ns - 5 us
- c) Division Factor: 0 to 255
- d) PRF: 250 MHz max. in, 50 MHz max. out
- e) Jitter, Stability: OK
- f) Prime Power: 100-240V AC, 50-60 Hz.

Reset Test

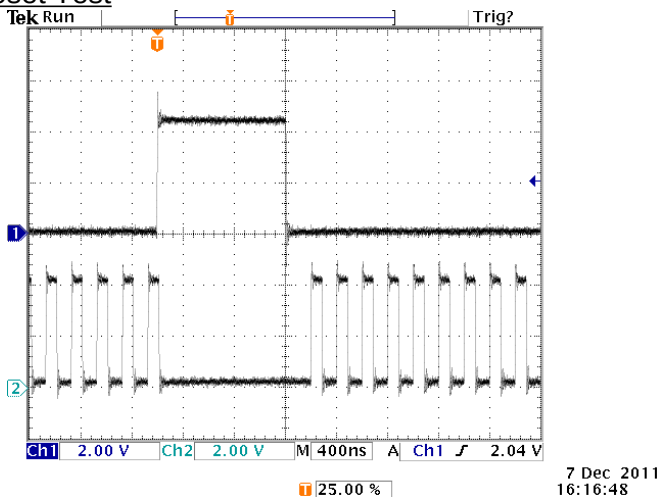

Top: RESET input.  
Bottom: TTL output, ÷5, f<sub>IN</sub>=25 MHz.  
Both: 2V/div, 400 ns/div.