



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-1011-B-OT
Type: General-Purpose High-Voltage Pulse Generator
S.N.: 12833
Date: May 30, 2012


Rise & Fall Time Test

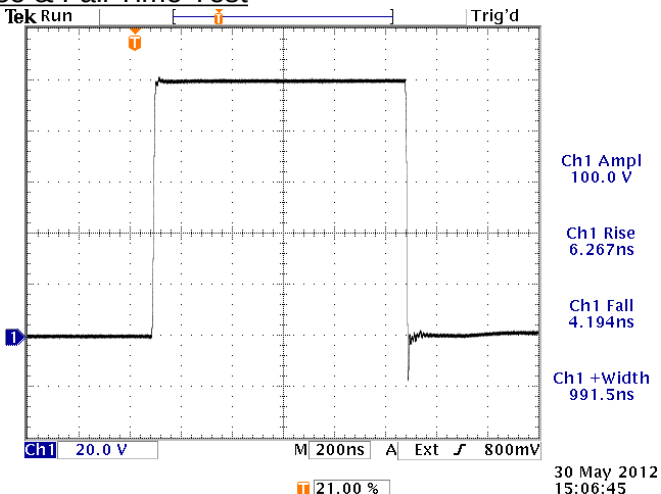

Output waveform (20V/div, 200ns/div) for:
PRF=10 kHz, PW=1 us, AMPL=+100V, ZOUT=2Ω

- a) Output Signal Amplitude: 0 to ±100V (R_L ≥ 50Ω)
- b) Offset: 0 to ±20V (R_L ≥ 50Ω)
- c) Pulse Width (FWHM): 100 ns - 1 ms (10% max. duty cycle)
- d) Rise Time (20%-80%): ≤ 10 ns
- e) Fall Time (80%-20%): ≤ 10 ns
- f) PRF: 0 - 1 MHz (0 - 500 kHz when offset > ±10V)
- g) Jitter, Stability: OK
- h) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

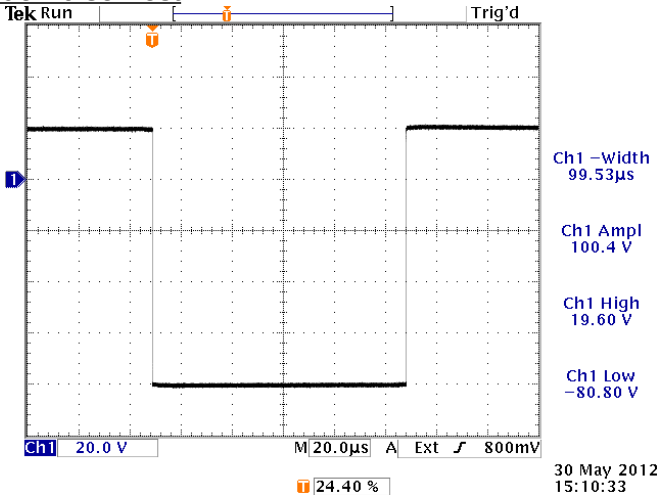

Output waveform (20V/div, 20µs/div) for PRF=100 Hz,
PW=100µs, AMPL=-100V, OFFSET=+20V, ZOUT=2Ω.

References levels: 20%, 80%.