



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVN-3-C-P-PN-AK8-AT
Type: Ultra-High-Speed Pulse Generator
S.N.: 13110
Date: February 12, 2014

Max. Output Amplitude: 10V/15V
Pulse Width (FWHM): 0.3 to 0.7/1.0 ns
Rise Time (20%-80%): ≤ 150 ps
Fall Time (80%-20%): ≤ 250 ps
PRF: 25 - 250 MHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

25 MHz, > 15V, < 300 ps,

25 MHz, > 15V, > 1 ns,


500 ps/div. 5 V/div (50 mV/div × 40 dB):

500 ps/div. 5 V/div (50 mV/div × 40 dB):

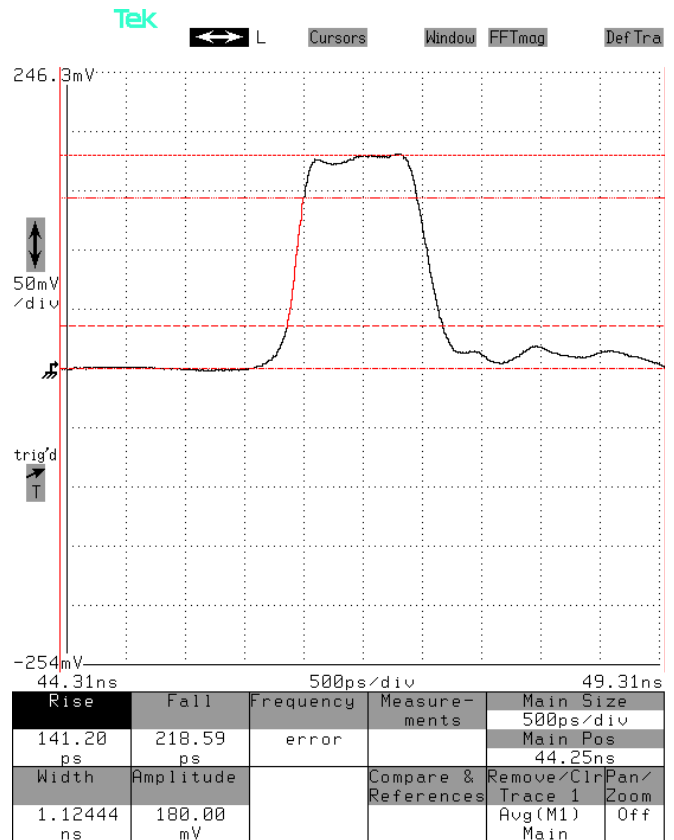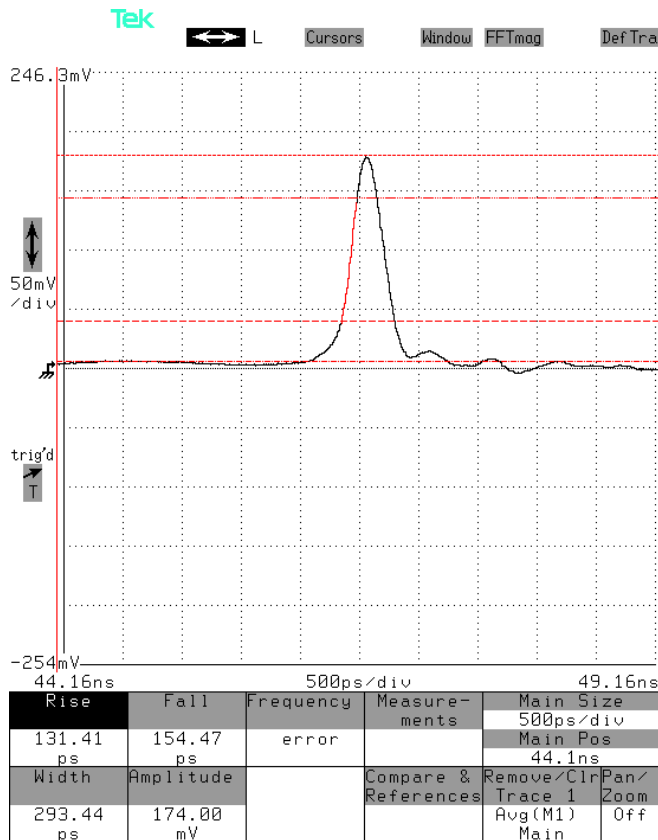


80 MHz, 15V, < 300 ps,

2 ns/div. 5 V/div (50 mV/div × 40 dB):

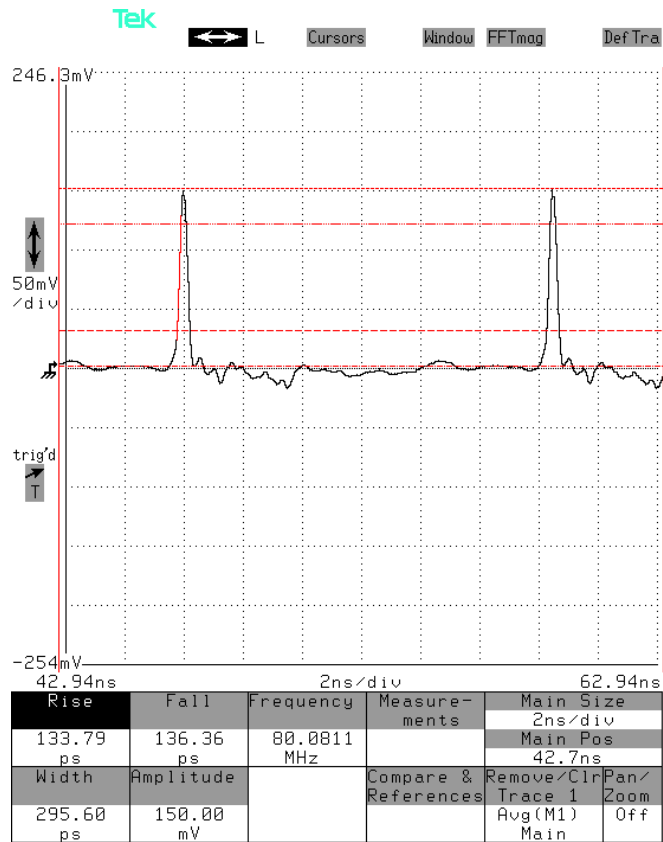


80 MHz, > 15V, > 1 ns,

2 ns/div. 5 V/div (50 mV/div × 40 dB):

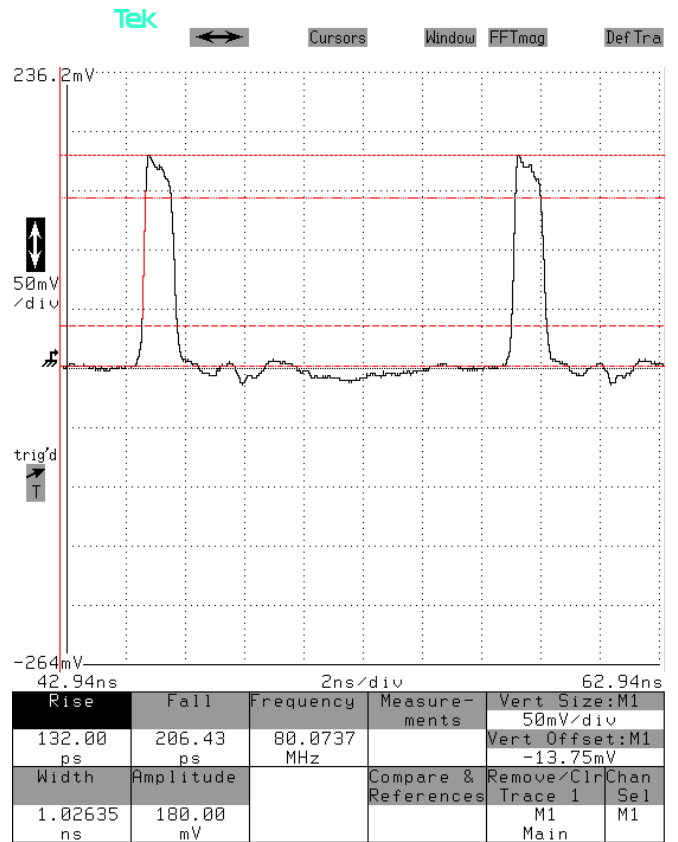

150 MHz, > 10V, > 1 ns,

2 ns/div. 5 V/div (50 mV/div × 40 dB):

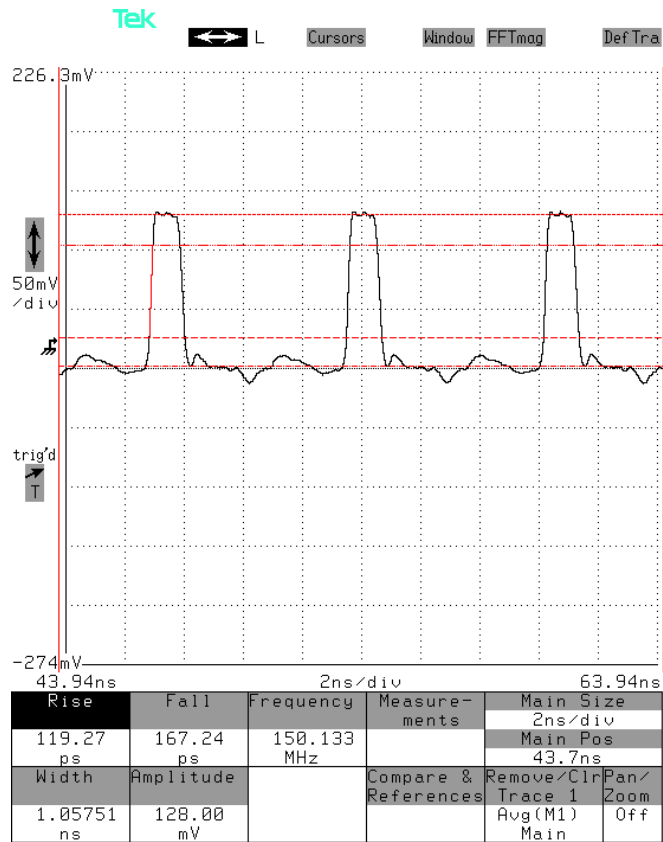

200 MHz, > 10V, 0.3 ns,

2 ns/div. 5 V/div (50 mV/div × 40 dB):

