



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-108E-4-B-P-AK5-MJLA  
Type: Pulsed Constant Current Generator or Laser Diode Driver  
S.N.: 13340  
Date: September 22, 2015


Rise/Fall Time Test

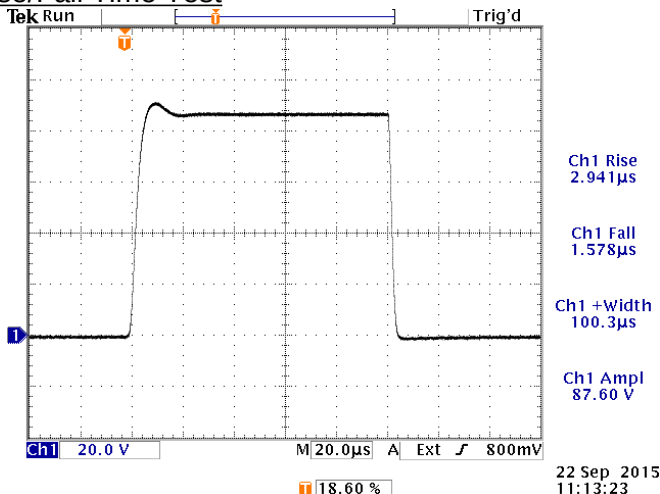

OUT, 150A into 0.6 Ohms, 100 us, 10 Hz.  
20V/div, 20 us/div.

- a) Output Signal Amplitude: up to +150A
- b) Pulse Width (FWHM): 20 us - 400 us
- c) Rise Time (20%-80%): < 15 us
- d) Fall Time (80%-20%): < 15 us
- e) PRF: 1 Hz - 1 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

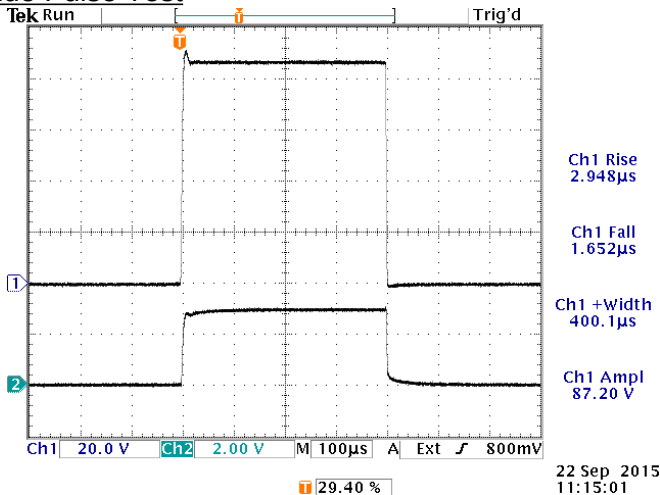

Top: OUT, 150A into 0.6 Ohms, 400 us, 2 Hz. 20V/div.  
Bottom: Monitor output (1V / 50A). 2V/div.  
Both: 100 us/div.

Reference levels: 20%, 80%.