

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVX-M4-S
Type: Current-Quadrupling Pulse Transformer
S.N.: 13459
Date: May 9, 2016


Impedance match: 50 Ω to 3 Ω
Maximum input: 30V
Maximum output: 7.5V / 2.5A
Maximum pulse width: 250 ns @ 15V
Rise time (20%-80%): < 300 ps
Droop: < 5 %

Basic specifications: →

Test Waveforms

Input to AVX-M4, generated by AVK pulser,

2 ns/div. 2 V/div (200 mV/div × 20 dB):

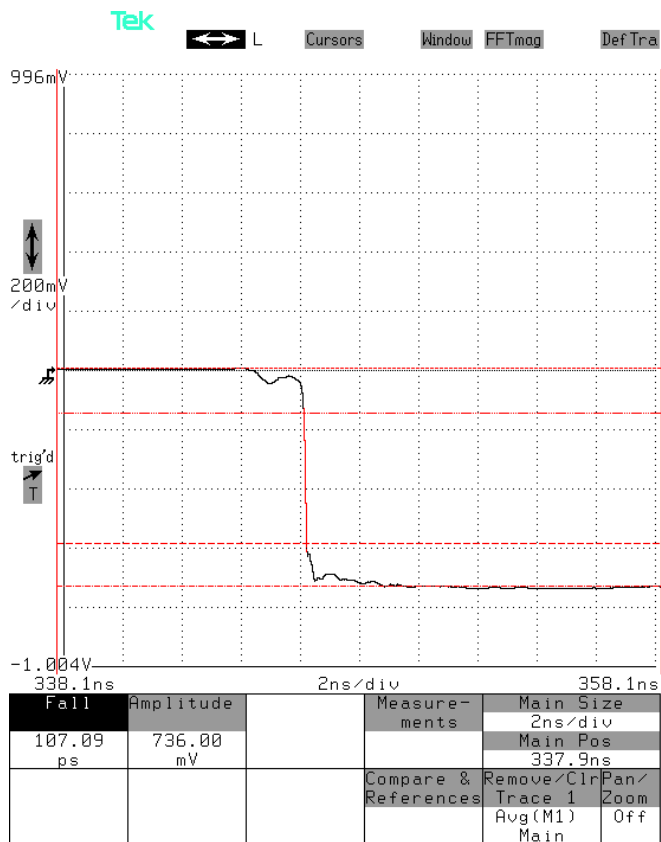

Corresponding output of AVX-M4, into 3.1Ω,

2 ns/div. 1 V/div (100 mV/div × 20 dB):

