



info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5


PERFORMANCE CHECKSHEET

Model: AVR-3-PW-TEK2-C-P  
Type: High-Speed Pulse Generator  
S.N.: 13489  
Date: May 31, 2021

Output Amplitude: Up to +250V, to 50Ω  
Pulse Width (FWHM): 0.25 – 250 us  
Rise Time (20%-80%): ≤ 10 ns  
Fall Time (80%-20%): ≤ 10 ns  
PRF: 1 Hz - 10 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.


Basic specifications: →

Narrow Pulse, Voltage Waveform, No Shorting Bar

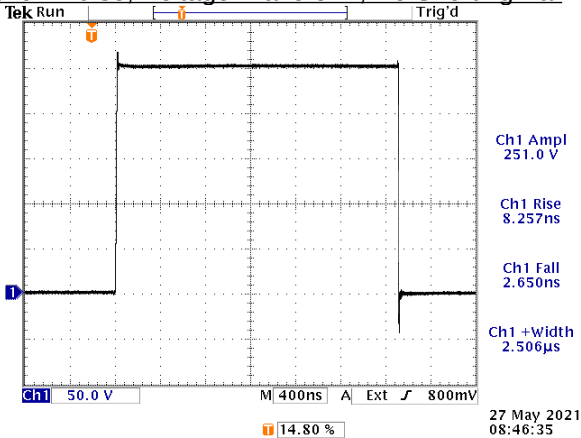


Output of “OUT” connector, terminated into the internal 50 Ohm load using a 6” length of RG-316 cable (i.e., no shorting bar). Viewed with TDS3052B scope. 50V/div, 400 ns/div. 10 Hz.

Wide Pulse, Voltage Waveform, No Shorting Bar

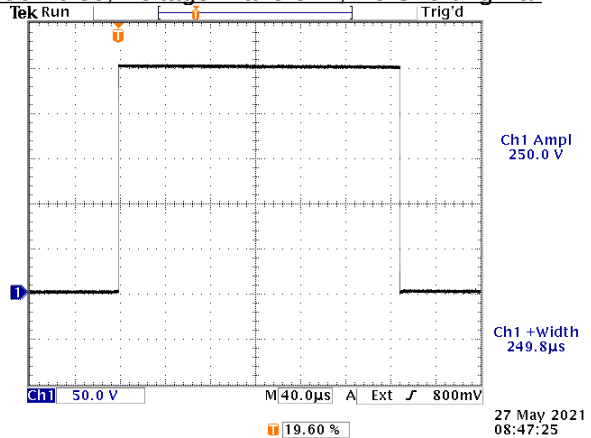


Output of “OUT” connector, terminated into the internal 50 Ohm load using a 6” length of RG-316 cable (i.e., no shorting bar). Viewed with TDS3052B scope. 50V/div, 40 us/div. 10 Hz.

Narrow Pulse to Shorting Bar and A6303 Probe

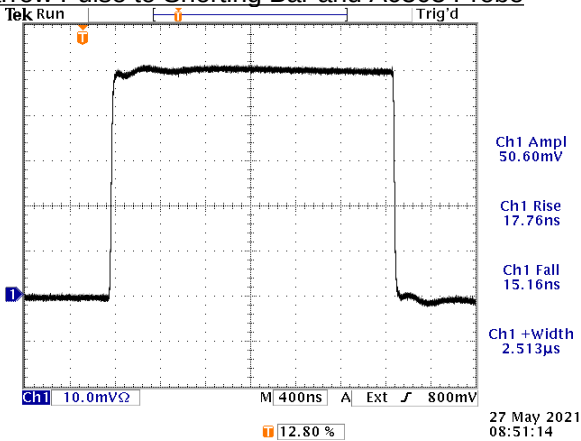

Output of A6303 probe and AM503B amplifier, viewed with TDS3052B scope. The A6303 probe is clamped to a sample shorting bar.

Wide Pulse to Shorting Bar and A6303 Probe

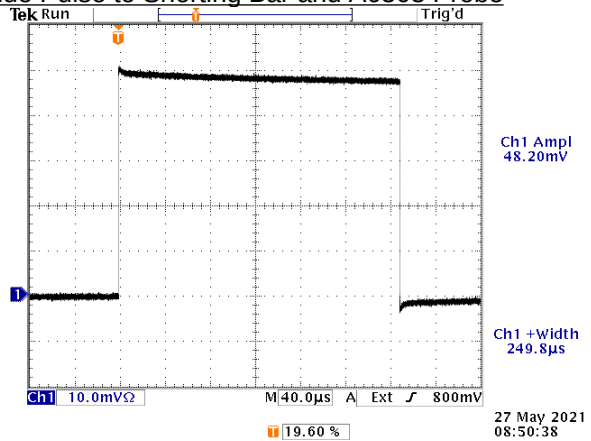

Output of A6303 / AM503B, viewed with TDS3052B scope. The probe is clamped to a sample shorting bar.

References levels: 20%, 80%