



□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/


PERFORMANCE CHECKSHEET

Model: AVX-CA-UB  
Type: Test jig for use with AVR-EB2A-B  
S.N.: 13698  
Date: April 4, 2018

Output Amplitude: N/A  
Pulse Width (FWHM): N/A  
Rise Time (20%-80%): N/A  
Fall Time (80%-20%): N/A  
PRF: N/A  
Jitter, Stability: N/A  
Prime Power: N/A

Basic specifications: →

Test Waveforms

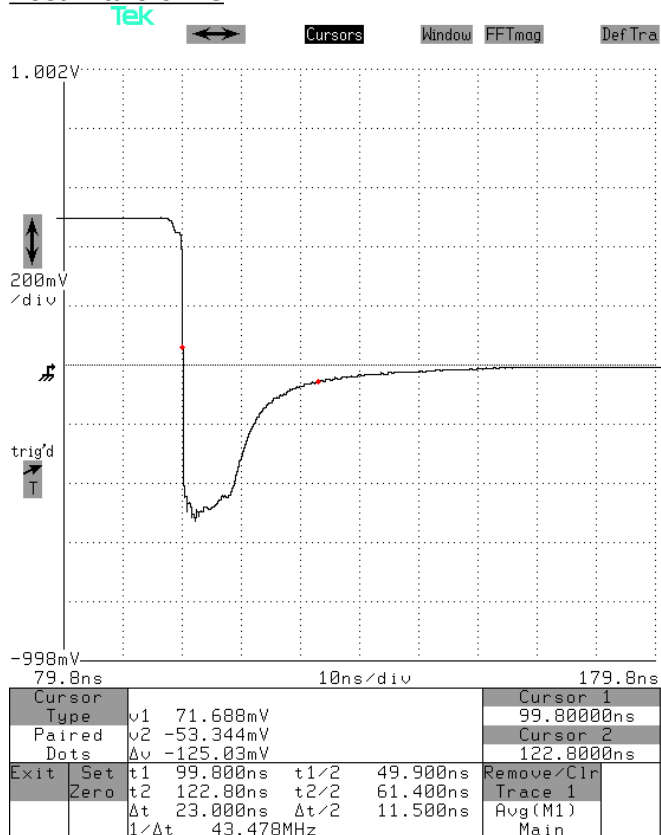

Output waveform of the test jig (200 mV/div ÷ 50Ω = 4 mA/div), when driven by an AVR-EB2A-B pulser, with a customer-supplied 1N6642UB DUT installed.

With  $I_F = +10$  mA,  $I_R = -10$  mA, a  $t_{RR}$  of 23 ns is observed (with no trailing ringing).