



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5



info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVX-S1-TO66-NP1A-RS45
Type: High-Bandwidth Output Module
S.N.: 13721
Date: May 28, 2018

Rise Time and Anode/Cathode Continuity Check

Test method: Short leads are soldered to two 51Ω chip resistors in parallel. A coaxial cable is soldered across the resistors. The signal lead is inserted into the anode pin socket. The grounded lead is inserted into the cathode pin socket. The total effective resistance is $51\ \Omega \parallel 51\ \Omega \parallel 50\ \Omega$ (R_{SCOPE}) = 16.9 Ω.

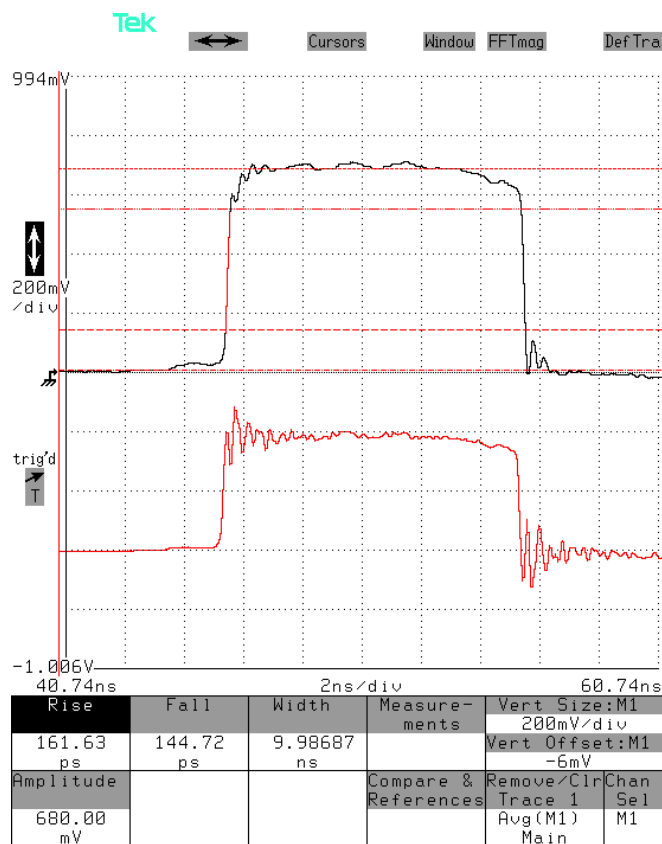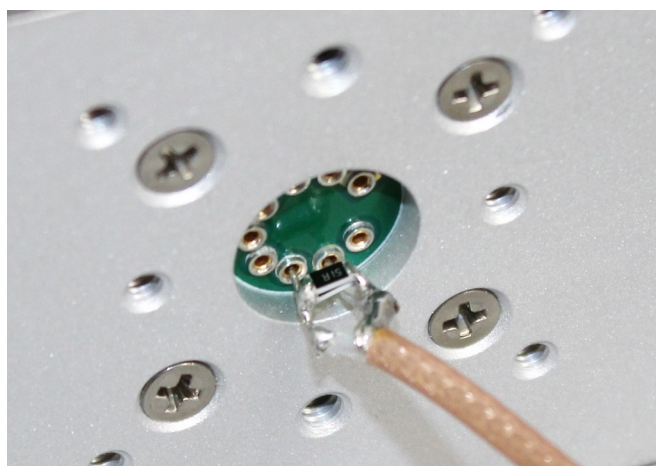

Top: Voltage measured across the resistor in response to a > 400 mA pulse applied from an Avtech AVO-9B2-B-P-P1B-T1B-AK1-AK8-VXI-R5 (S/N 13726) pulse generator. It should be approximately $> 0.4A \times 16.9\ \Omega = 6.75V$, which agrees with the observed waveform. 1V/div (= 100 mV/div × 20 dB), 2 ns/div.

Bottom: "MI" output, 1V/div (= 100 mV/div × 20 dB), 2 ns/div.