



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/


PERFORMANCE CHECKSHEET

Model: AVR-5B-B-PN-ADB
Type: High Voltage Pulse Generator
S.N.: 13814
Date: January 15, 2019

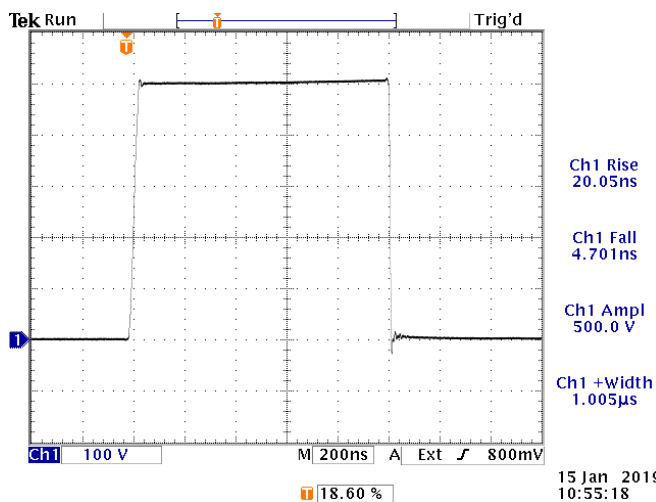


1 kHz, 1 us, +500V into a 50Ω load.
100 V/div, 200 ns/div.

- a) Output Signal Amplitude: up to ±500V
- b) Pulse Width (FWHM): 100 ns - 10 ms
- c) Rise Time (20%-80%): < 30 ns
- d) Fall Time (20%-80%): < 30 ns
- e) PRF: 1 Hz - 10 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

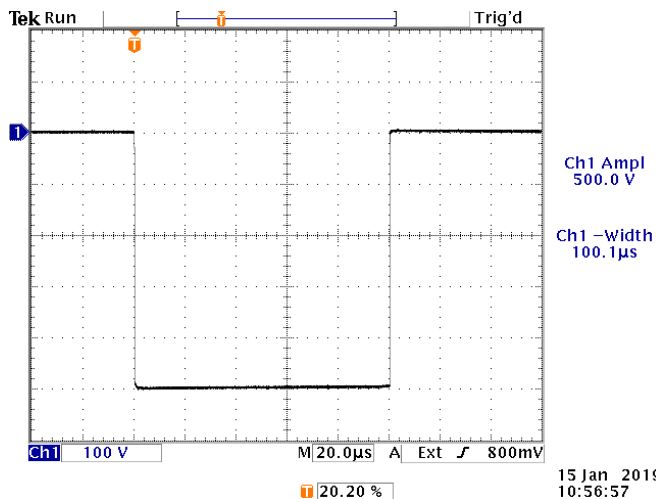

100 Hz, 100 us, -500V into a 50Ω load.
100 V/div, 20 us/div.

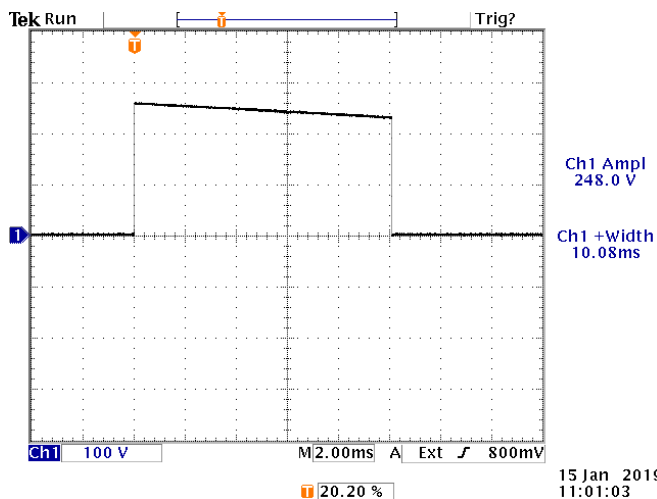

0.1 Hz, 10 ms, +500V into a 50Ω load, with 50Ω output impedance. 100 V/div, 2 ms/div.

References levels: 20%, 80%.