



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-2A-B-P-AC22-CLZ-EA-M-OS
Type: High Speed Laser Diode Driver
S.N.: 13817
Date: December 18, 2018

Output Amplitude: up to +5A, to 12.5Ω
Pulse Width (FWHM): 4 – 50 ns
Rise Time (20%-80%): ≤ 2.5 ns
Fall Time (80%-20%): ≤ 3.5 ns
PRF: 1 Hz - 20 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

10 kHz, 6 ns, +62.5V into 12.5 Ohms,

10 kHz, 50 ns, +62.5V into 12.5 Ohms,

10 ns/div. 20 V/div (200 mV/div × 40 dB):

10 ns/div. 20 V/div (200 mV/div × 40 dB):

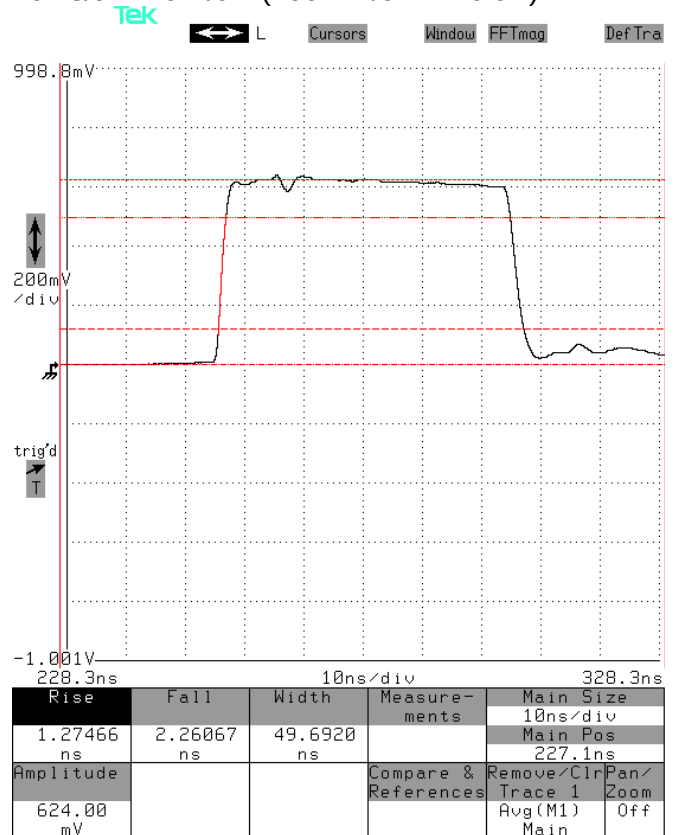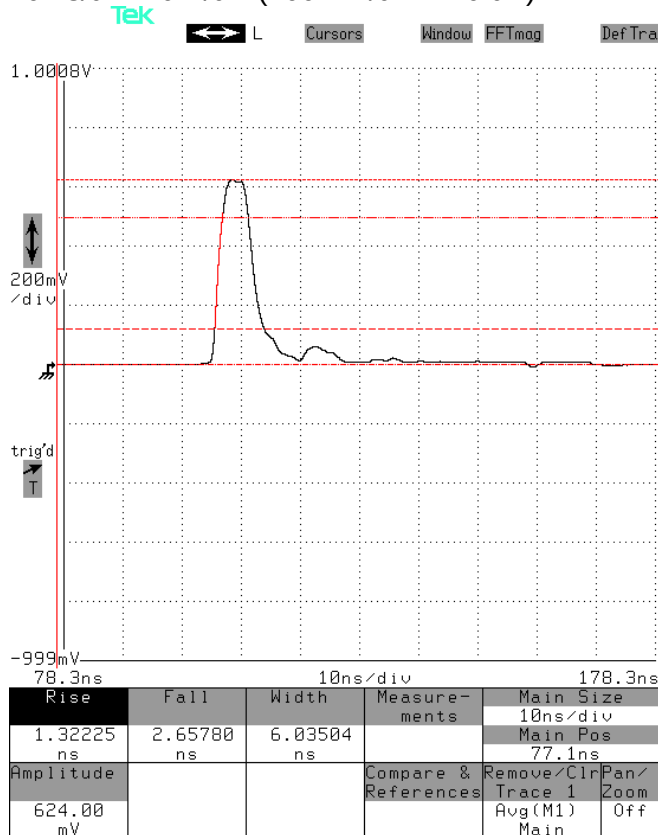

The 12.5 Ohm load consisted of three 51 Ohm resistors in parallel, in parallel with the 50 Ohm input impedance of the sampling oscilloscope.

$$62.5V / 12.5\Omega = 5.0A$$