



info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5


PERFORMANCE CHECKSHEET

Model: AVX-MRB1  
Type: Current-Doubling Pulse Transformer  
S.N.: 13887  
Date: June 17, 2019

Impedance match: 50 Ω to 12.5 Ω  
Maximum input: 100V  
Maximum output: 50V / 4A  
Maximum pulse width: 5 us  
Rise time (20%-80%): < 1 ns  
Drop: < 5 %


Basic specifications: →

Rise Time Test

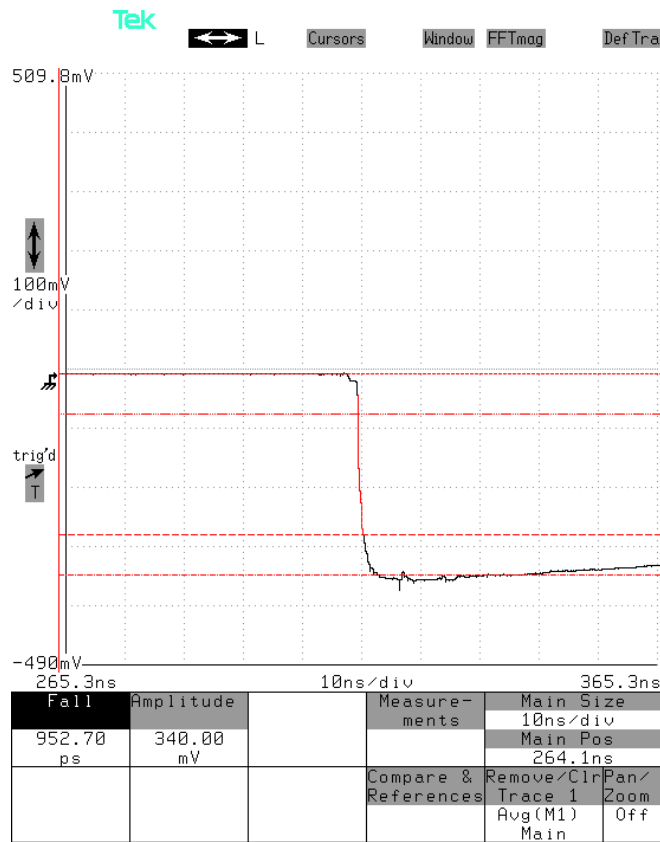

Output of AVX-MRB1 into 12.5 Ohms, in response to a -7.2V pulse with ~100 ps rise time. 1 V/div (100 mV/div × 20 dB), 10 ns/div.

Wide High-Voltage Pulse Test

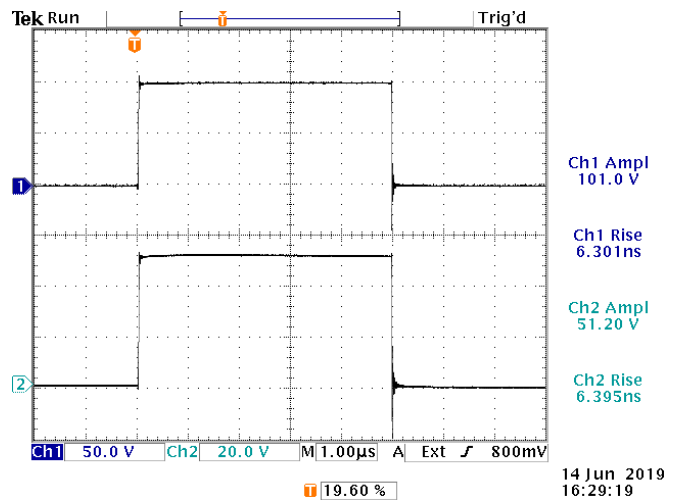

Top: +100V, 5 us pulse from model AVR-3-B. 50 V/div, 1 us/div.

Bottom: +50V output from AVX-MRB1 into a 12.5 Ohm load. 20 V/div, 1 us/div.