



info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVR-E3-B-PN-AK2-AK8-W3-CC1-ID1-AC22
Type: Ultra-High-Speed Pulse Generator
S.N.: 13979
Date: May 26, 2020

Output Amplitude: up to ±100V, to 50Ω
Pulse Width (FWHM): 1 ns to 5 us
Rise Time (20%-80%): ≤ 500 ps
Fall Time (80%-20%): ≤ 1 ns
PRF: 1 Hz - 20 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

20 kHz, < 1 ns, ≥ +100V,

20 kHz, 10 ns, ≥ -100V,


2 ns/div. 50 V/div (50 mV/div × 60 dB):

2 ns/div. 50 V/div (50 mV/div × 60 dB):

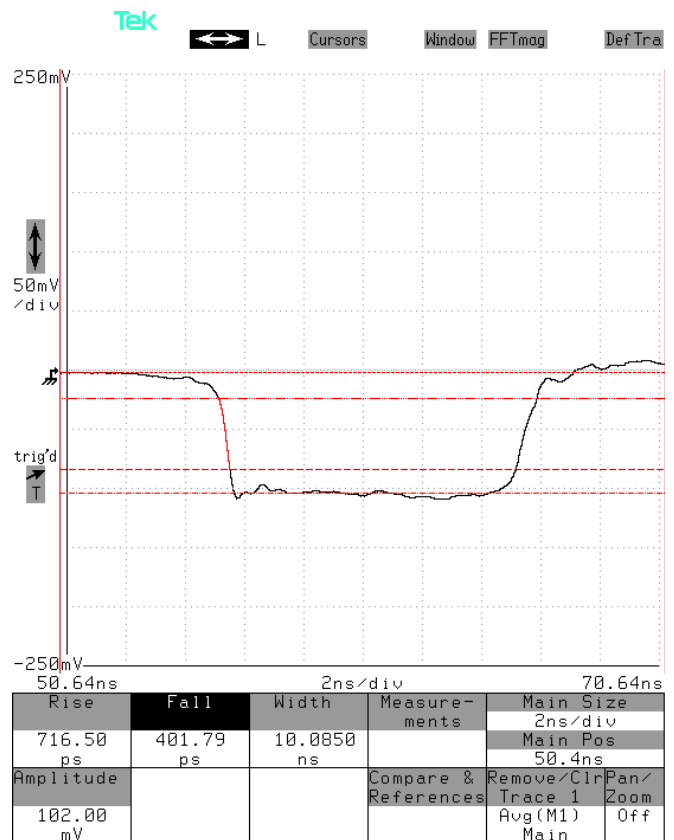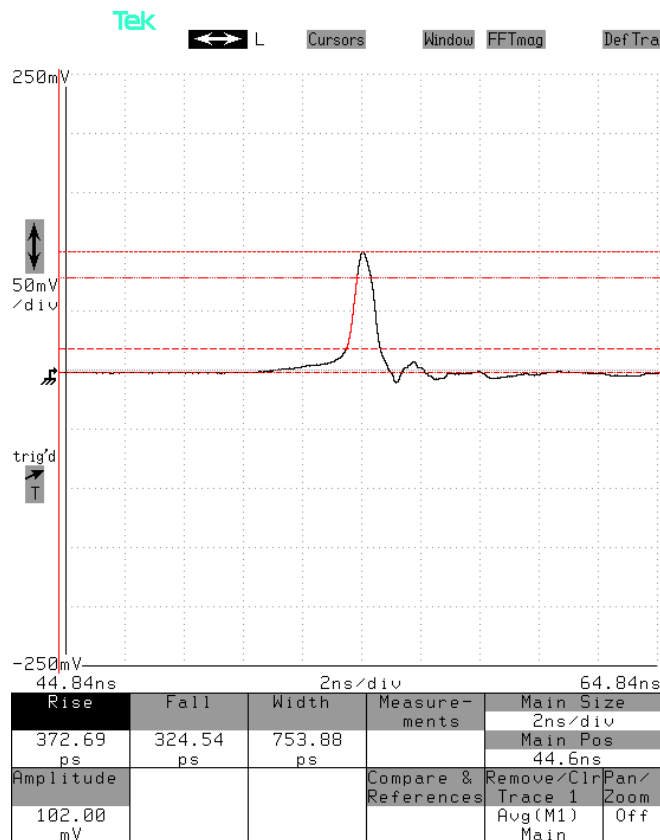


20 kHz, 100 ns, $\geq +100V$, leading edge,

5 ns/div. 50 V/div (50 mV/div \times 60 dB):

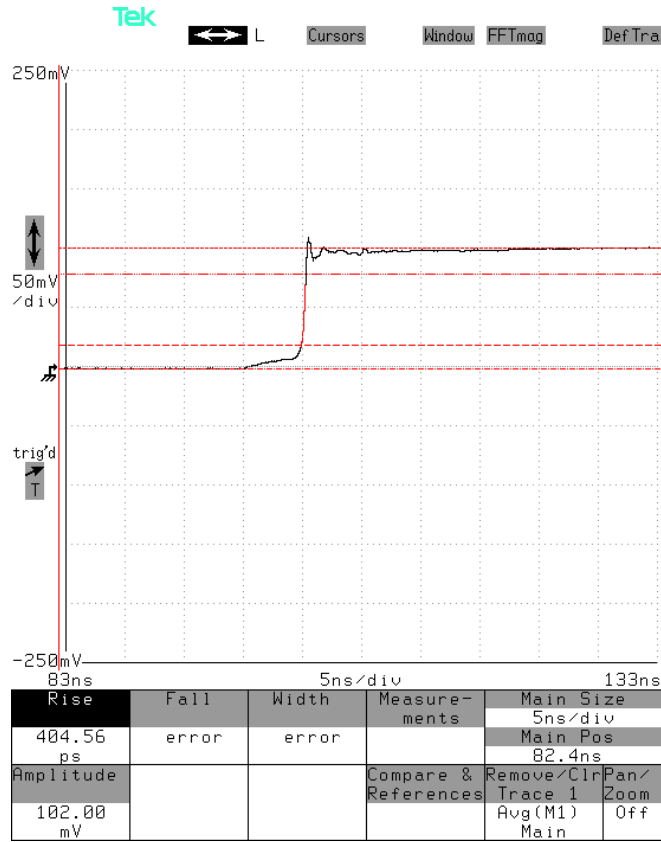


20 kHz, 100 ns, $\geq +100V$, trailing edge,

5 ns/div. 50 V/div (50 mV/div \times 60 dB):

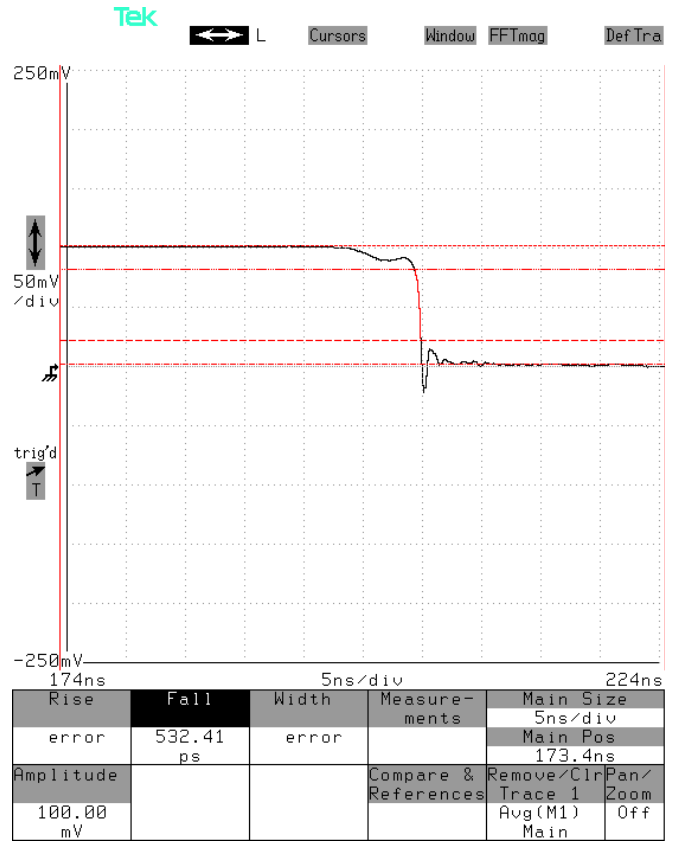

10 kHz, 5 us, -100V, leading edge,
 5 ns/div. 50 V/div (50 mV/div × 60 dB):

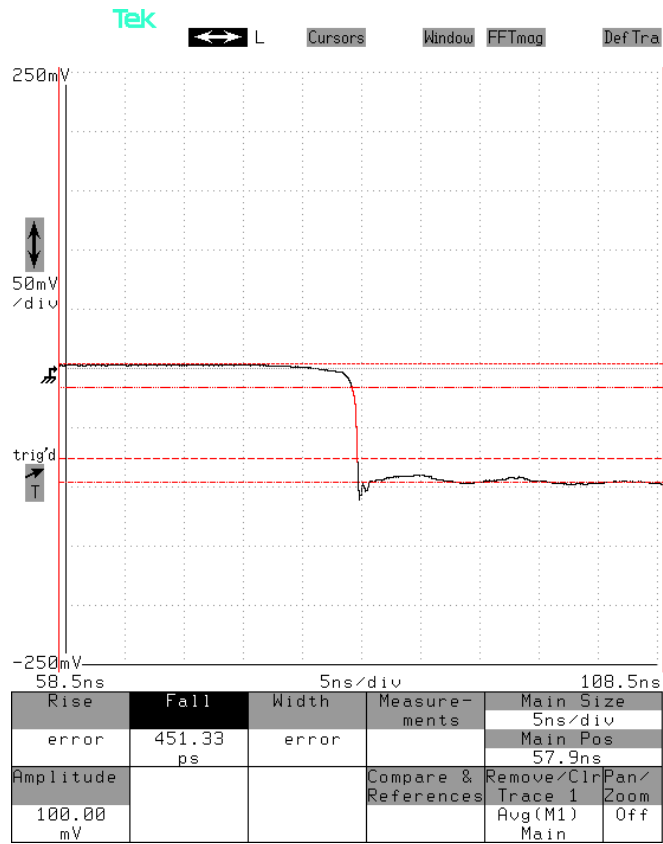

10 kHz, 5 us, -100V, full pulse,
 1 us/div. 50 V/div (50 mV/div × 60 dB):

