




info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AV-107C-B-PN-AC22  
Type: Pulsed Laser Diode Driver  
S.N.: 14168  
Date: October 25, 2021

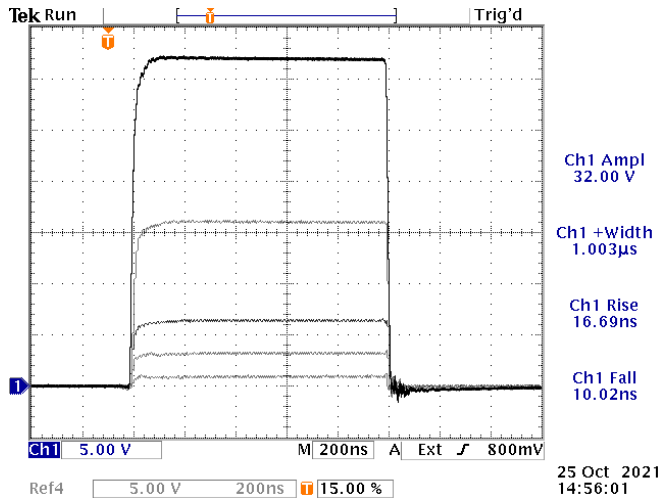

+0.3 / +1 / +2 / +5 / +10A into a 3.21 Ohm load installed on the rear panel. 5 V/div, 200 ns/div.

a) Output Signal Amplitude: up to ±10A

b) Pulse Width (FWHM): 100 ns to 1 us


c) Rise Time (20%-80%): < 20 ns

d) Fall Time (80%-20%): < 20 ns


e) PRF: 1 Hz – 5 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

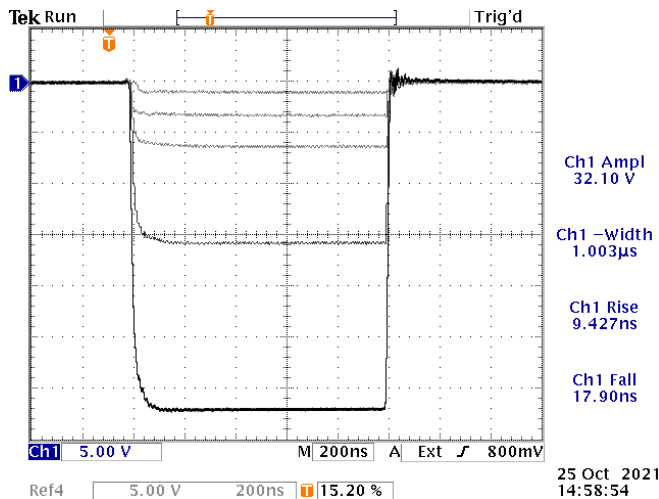

-0.3 / -1 / -2 / -5 / -10A into a 3.21 Ohm load installed on the rear panel. 5 V/div, 200 ns/div.

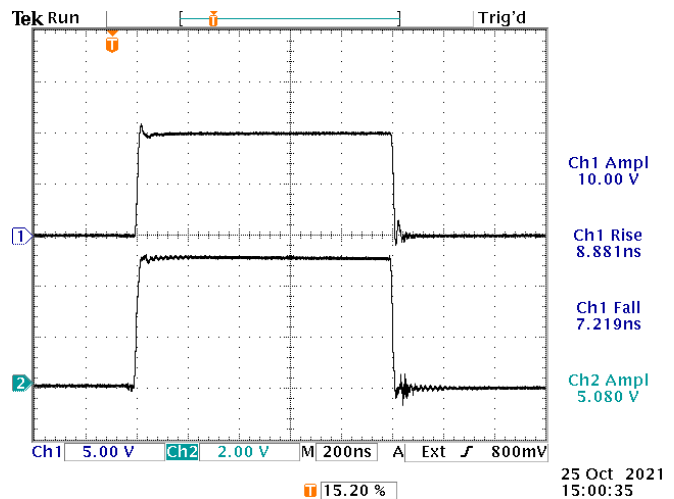

Top: +10A into the supplied AV-CTL1-ENC test load (0.981Ω). 1 us pulse width. 5 V/div, 200 ns/div.  
Bottom: Monitor output into 50Ω.