



info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVRK-4-B-TR-DPF-P  
Type: High Voltage Pulse Generator  
S.N.: 14182  
Date: November 19, 2021

Output Amplitude: up to +750V, to 50Ω  
Pulse Width (FWHM): 6 to 20 ns  
Rise Time (20%-80%): ≤ 2 ns  
Fall Time (80%-20%): varies with PW / ampl  
PRF: 1 Hz - 1 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz

Basic specifications: →



Test Waveforms

CH1, 1 kHz, 20 ns, +750V, into 50Ω

CH2, 1 kHz, 6 ns, +750V, into 50Ω


5 ns/div, 200 V/div (200 mV/div × 60 dB)

5 ns/div, 200 V/div (200 mV/div × 60 dB)

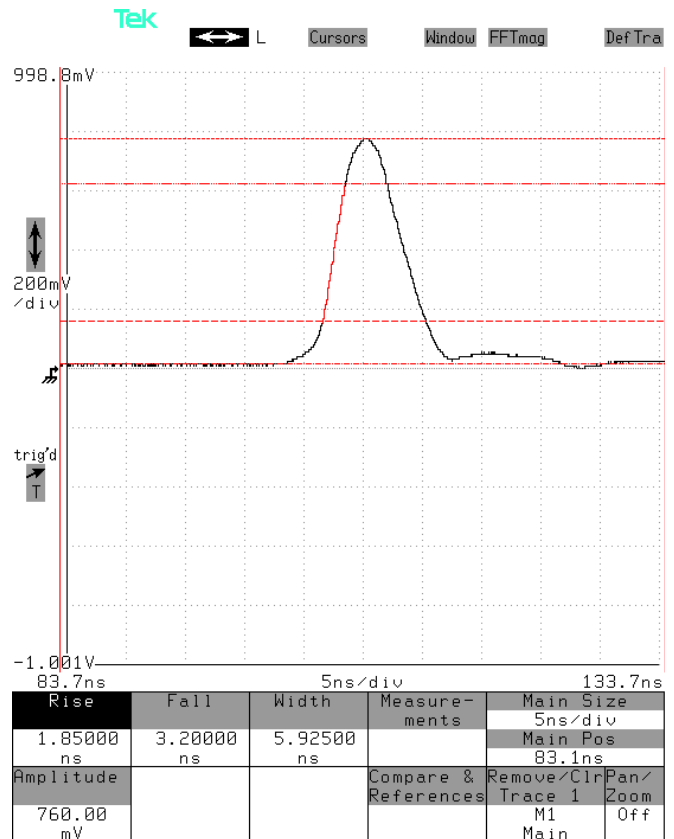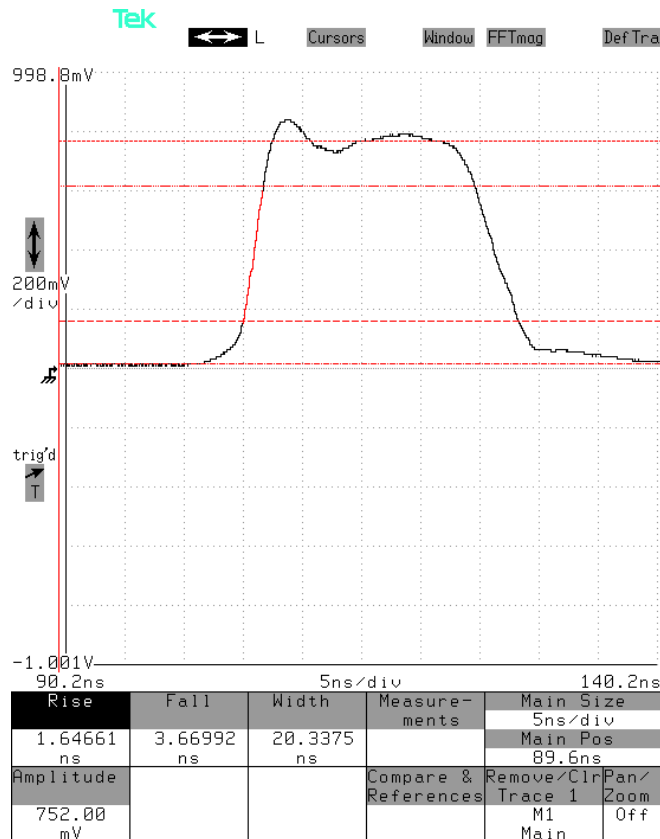

Pulse doublet, 1 kHz, both 20 ns, both > +750V, into 50Ω

50 ns/div, 200 V/div (200 mV/div × 60 dB)

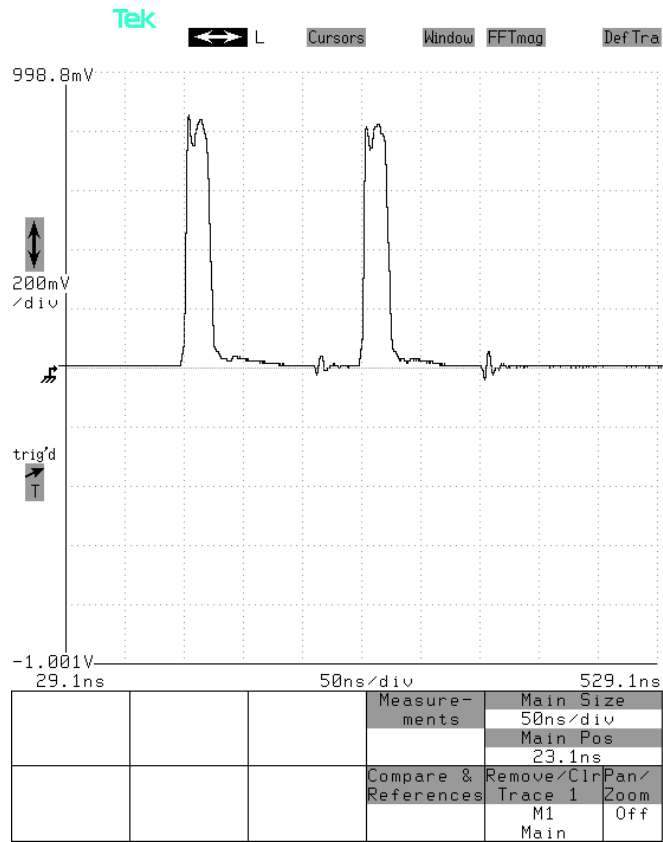

Pulse doublet, 1 kHz, both < 6 ns, both > +750V, into 50Ω

50 ns/div, 200 V/div (200 mV/div × 60 dB)

