




info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AV-107E-B-P-AC22
Type: Pulsed Laser Diode Driver
S.N.: 14209
Date: February 1, 2022

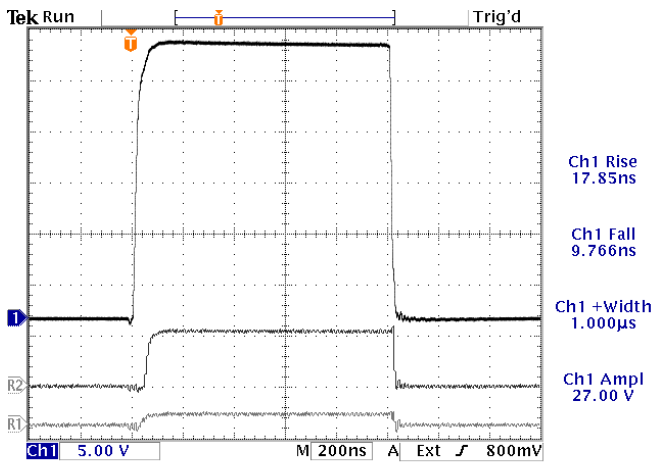


- a) Output Signal Amplitude: up to +2.5A
- b) Pulse Width (FWHM): 200 ns to 200 us
- c) Rise Time (20%-80%): < 30 ns
- d) Fall Time (80%-20%): < 30 ns
- e) PRF: 1 Hz – 1 kHz

31 Jan 2022 22:27:13
+0.1 / +0.5 / +2.5A into the supplied AV-CTL11-ENC test load (10.80Ω). 1 us pulse width. 5 V/div, 200 ns/div.

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

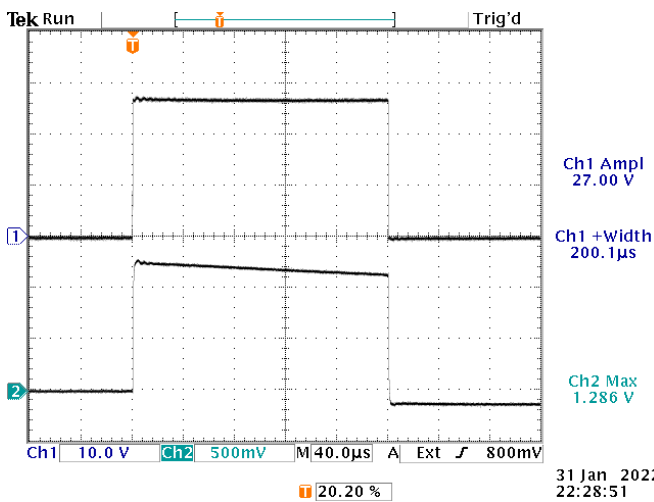

31 Jan 2022 22:28:51
Top: +2.5A into the supplied AV-CTL11-ENC test load (10.80Ω). 200 us pulse width. 10 V/div, 40 us/div.
Bottom: MON MAX output into 50Ω (500 mV/div).

References levels: 20%, 80%.