


PERFORMANCE CHECKSHEET

Model: AVRQ-5-B-FPD-AC06-ATA3  
 Type: Common Mode Transient Immunity (CMTI) Test for Opto-Couplers  
 S.N.: 14250  
 Date: June 27, 2022

Minimum Rise Time Test, No DUT, Positive

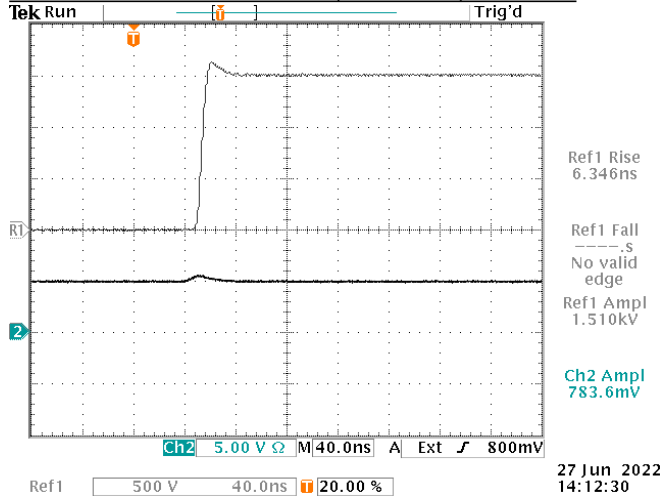

Top = +1.5 kV HV out (stored - with signal disconnected before recording logic waveform).

Bottom = Logic "A" out for +1.5 kV, VCC2 = +5V, using P6246, and no DUT, R2 = 1 kΩ. (This shows the parasitic capacitive coupling onto the Logic "A" out.)

a) Output Signal Amplitude: -1.5 kV or +1.5 kV



b) Rise Time (10%-90%): < 10 to > 50 ns

c) PRF: 1 Hz - 10 Hz

d) Jitter, Stability: OK


e) Prime Power: 100-240V AC, 50-60 Hz.

Minimum Rise Time Test, No DUT, Negative

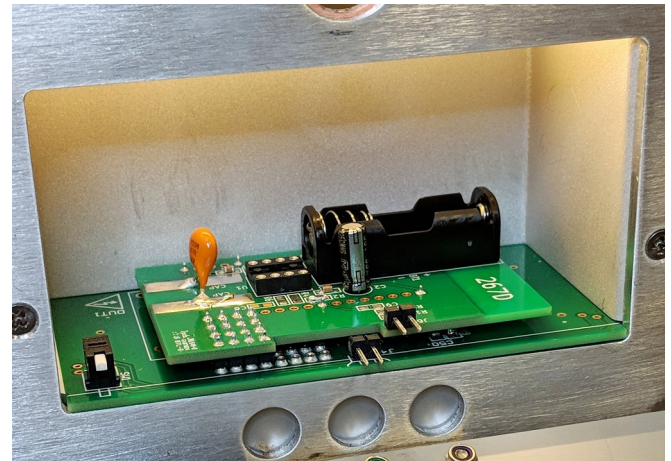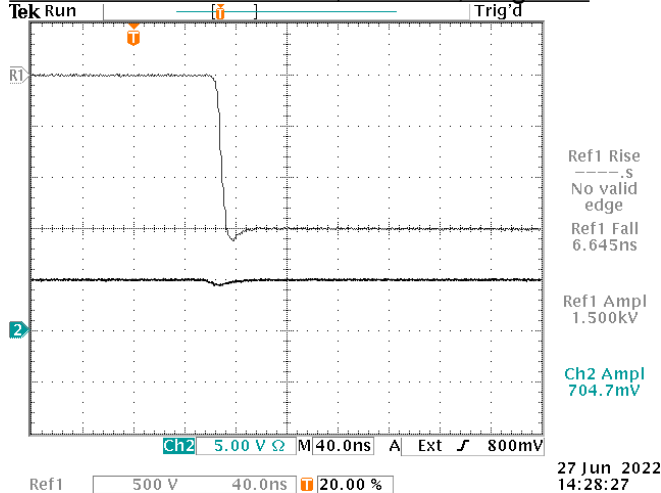


Daughterboard installed in positive position (with no DUT IC)

Positive Rise Time, capacitive load = 0 pF

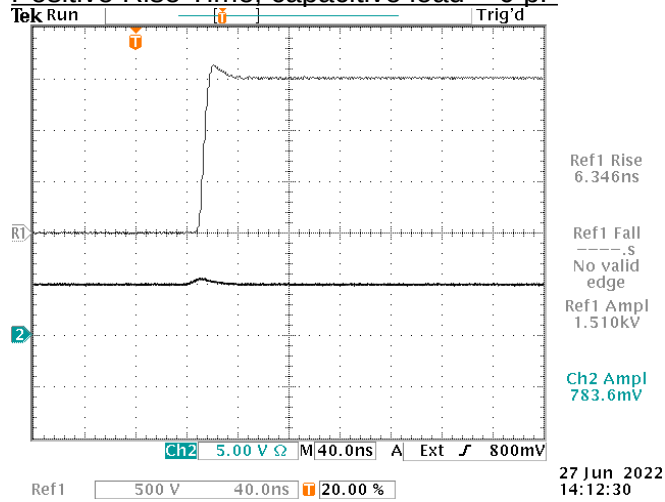


Positive Rise Time, capacitive load = 300 pF

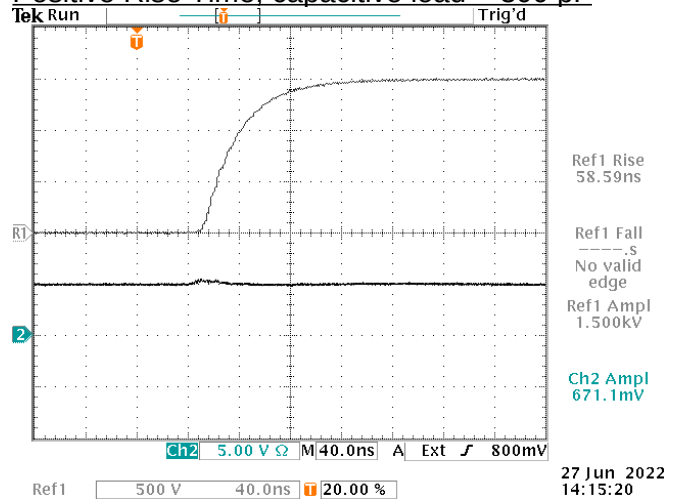


Top = HV out (stored - with signal disconnected before recording logic waveform)  
 Bottom = Logic "A" out, VCC2 = +5V, using P6246 probe, and no DUT, R2 = 1 kΩ



Positive Rise Time, capacitive load = 75 pF

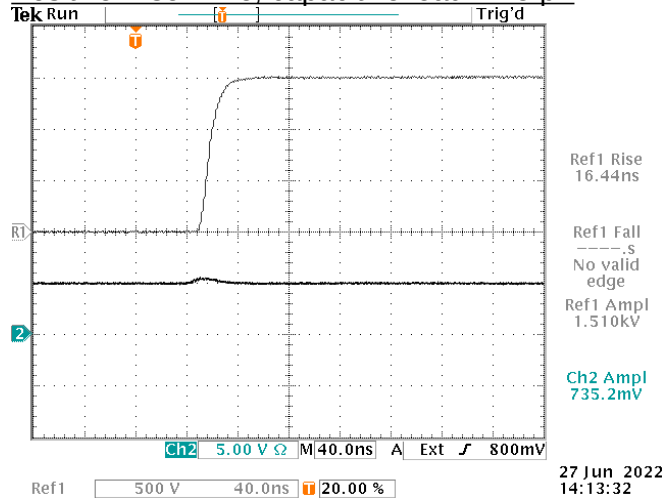

Positive Rise Time, capacitive load = 600 pF

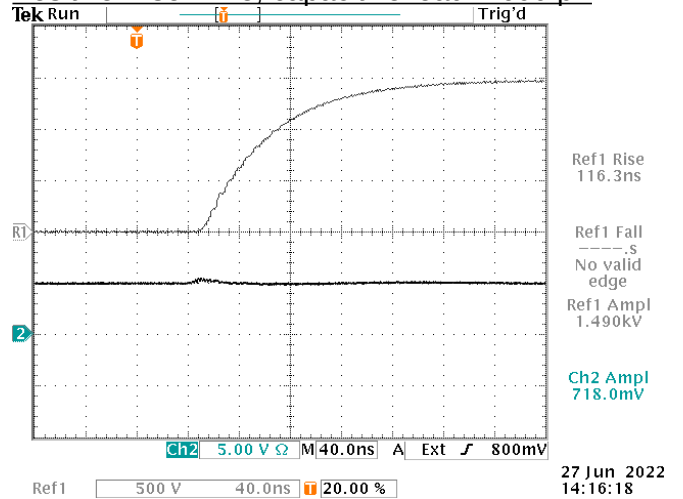


Positive Rise Time, capacitive load = 150 pF

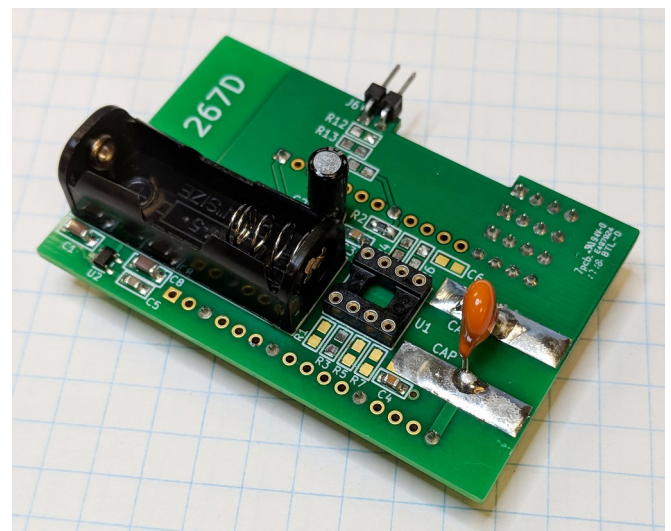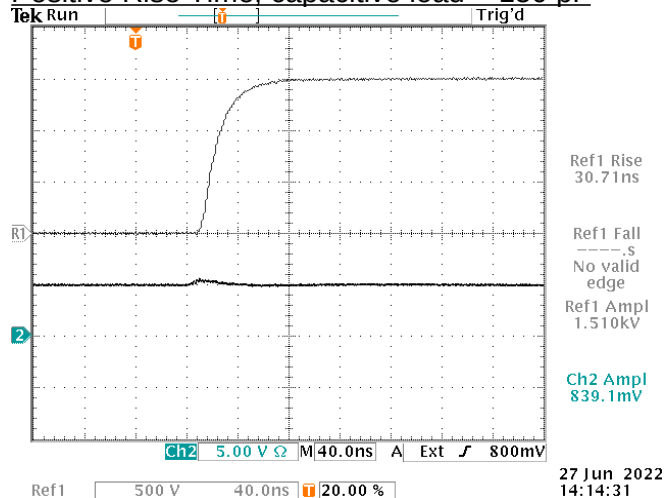


150 pF capacitor (orange) on daughterboard

Negative Rise Time, capacitive load = 0 pF

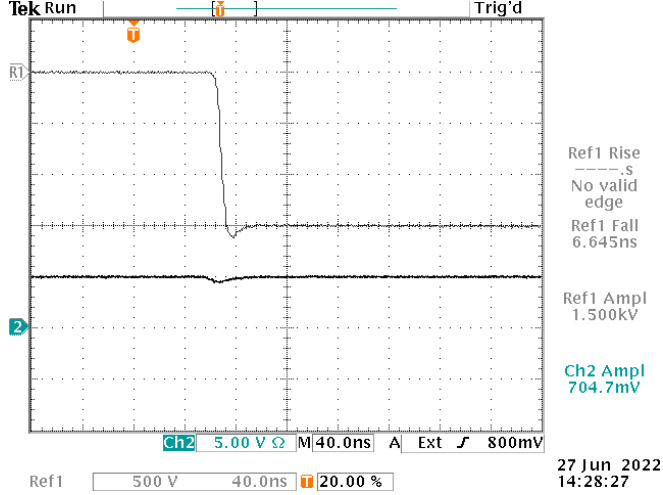


Negative Rise Time, capacitive load = 300 pF

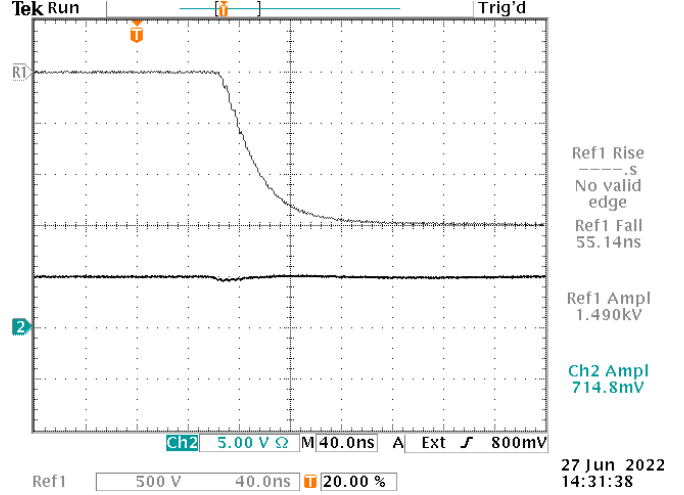


Top = HV out (stored - with signal disconnected before recording logic waveform)  
 Bottom = Logic "A" out, VCC2 = +5V, using P6246 probe, and no DUT, R2 = 1 kΩ



Negative Rise Time, capacitive load = 75 pF

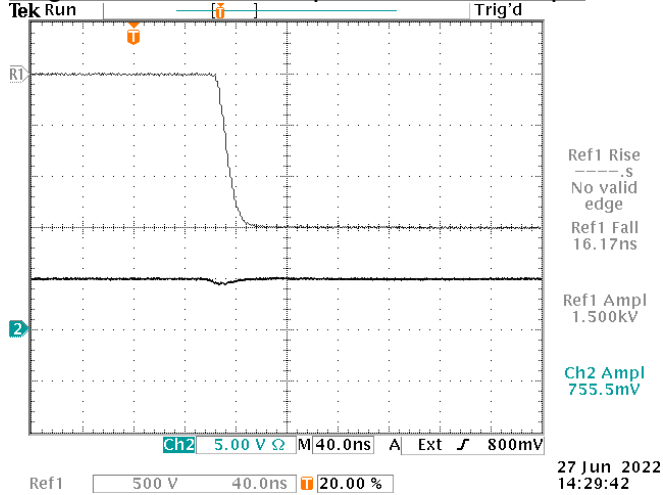

Negative Rise Time, capacitive load = 600 pF

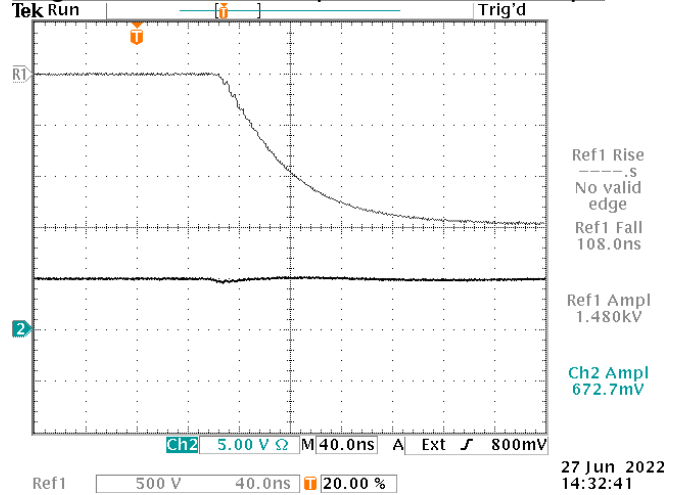


Negative Rise Time, capacitive load = 150 pF

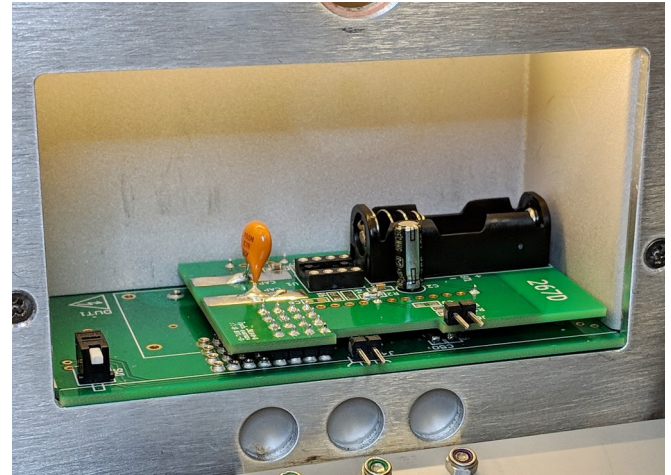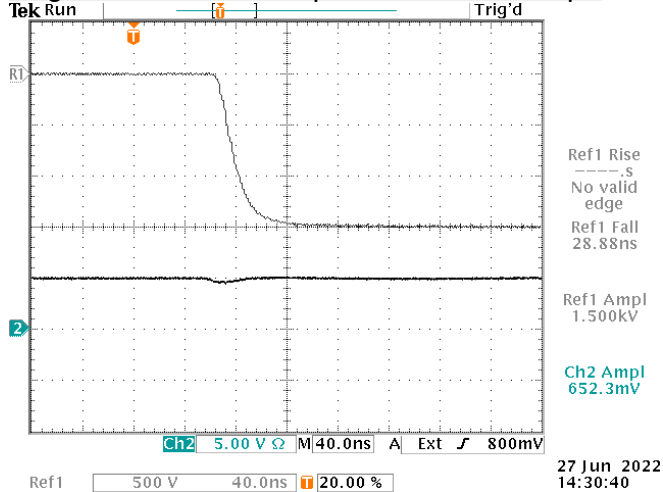


Daughterboard installed in negative position (with no DUT IC)

**VO3120 Test, 0 mA input, +1.5 kV pulse**

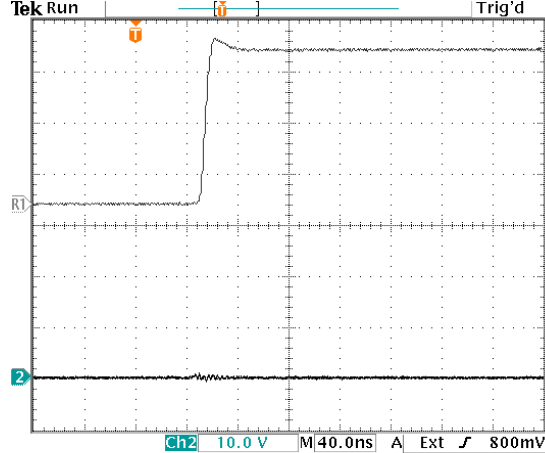

27 Jun 2022 14:48:40


**VO3120 Test, 10 mA input, +1.5 kV pulse**

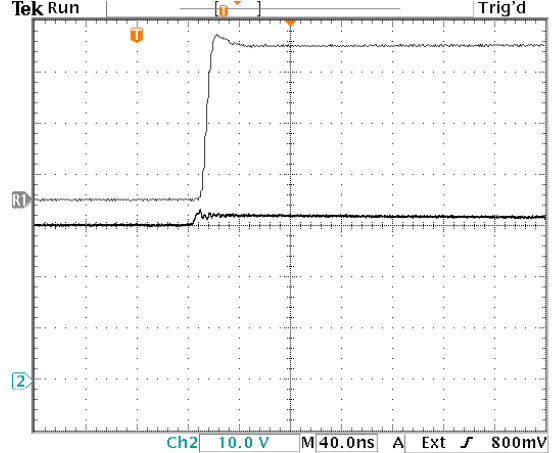

27 Jun 2022 14:50:32


Top = HV out (stored - with signal disconnected before recording logic waveform)  
 Bot = Logic "A" out, +32V VCC2. P6139A probe.

**VO3120 Test, 0 mA input, -1.5 kV pulse**

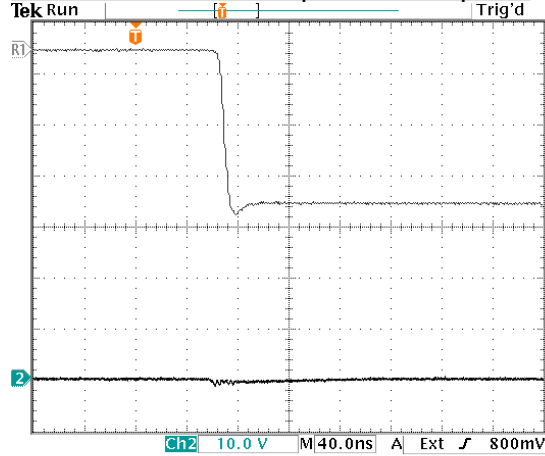


27 Jun 2022 14:47:38


**VO3120 Test, 10 mA input, -1.5 kV pulse**

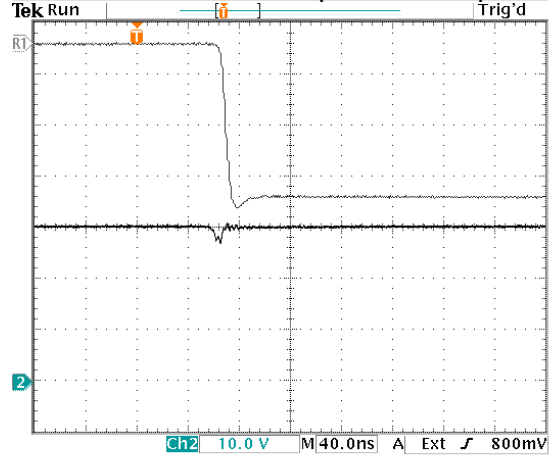

27 Jun 2022 14:51:33

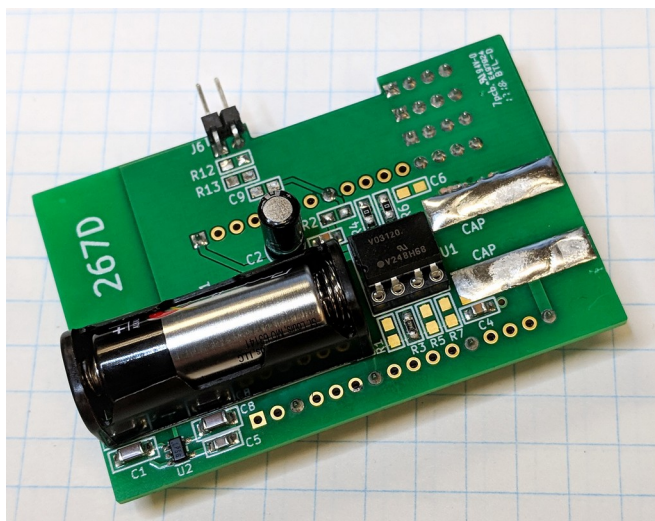


Top side of daughterboard with VO3120 configured for 10 mA bias.

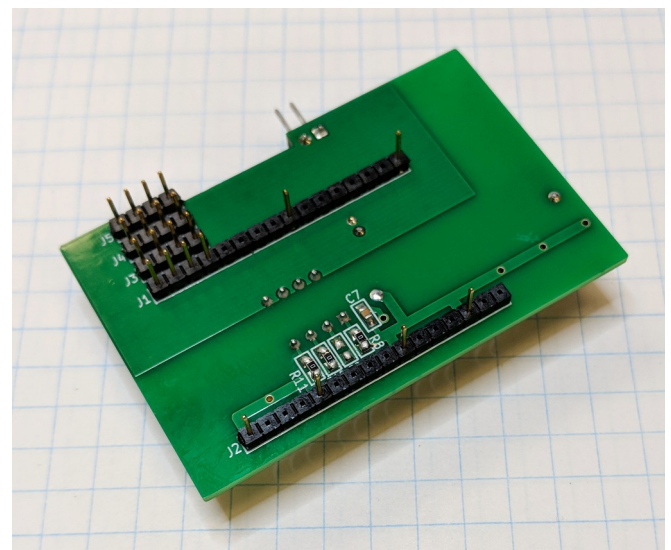


Bottom side of daughterboard with VO3120 configured for 10 mA bias.

HCPL-7721, 0V input, +1.5 kV, 150 pF added

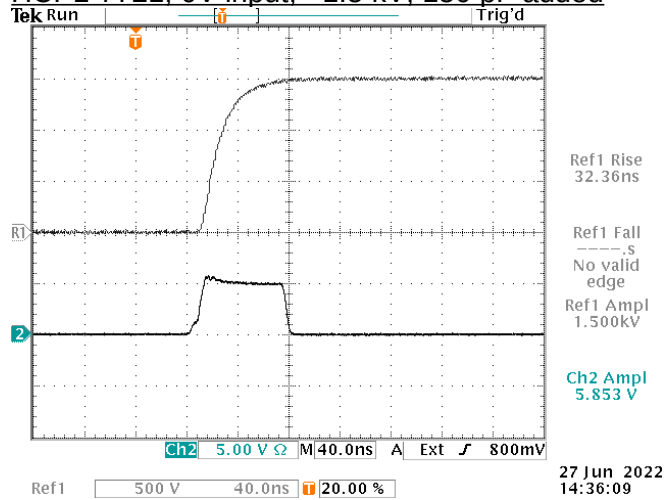


HCPL-7721, 5V input, +1.5 kV, 150 pF added


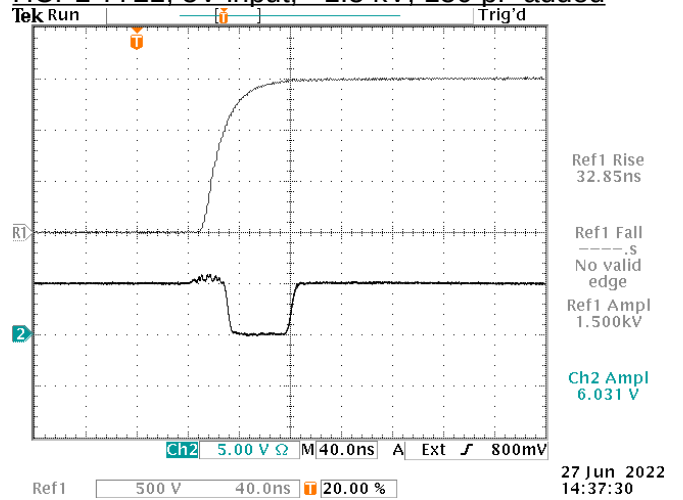


Top = high voltage pulse (stored - with signal disconnected before recording logic waveform).  
 Bot = Logic "A" out (with 0V input) using P6246.


HCPL-7721, 0V input, -1.5 kV, 150 pF added

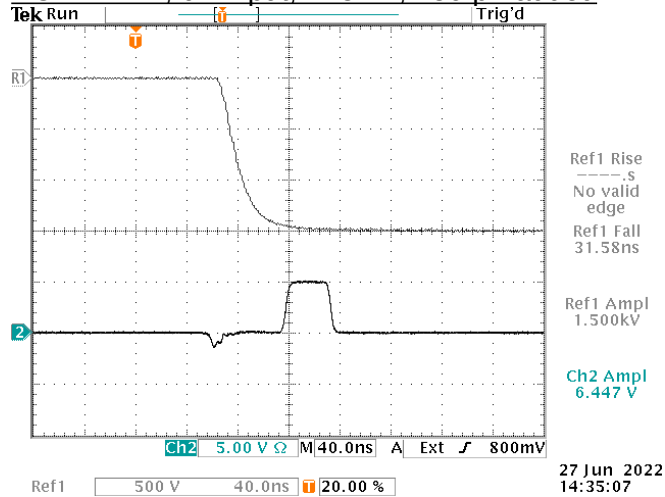

HCPL-7721, 5V input, -1.5 kV, 150 pF added

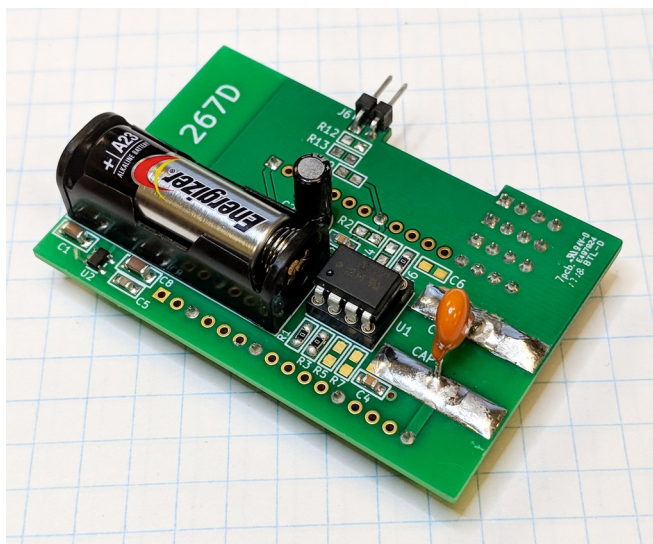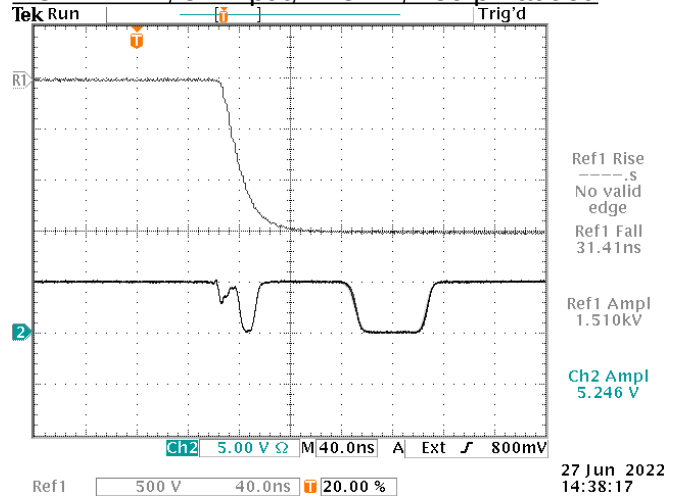

Top side of daughterboard with HCPL-7721 configured for 5V bias.

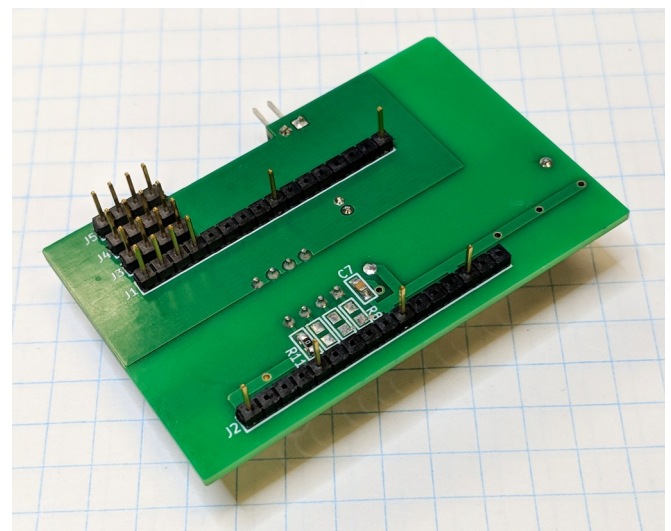

Bottom side of daughterboard with HCPL-7721 configured for 5V bias.