



info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVR-EB4-B-NXPB-SOD123W
Type: Semiconductor Device Tester
S.N.: 14258
Date: August 8, 2022

Output Amplitude: to +0.5A, -1A
Pulse Width (FWHM): 2 us (-)
Switching time (10%-90%): ≤ 1.5 ns typically
PRF: 1 Hz - 1 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Reverse recovery transient of Central Semi CMMR1S-02 at +0.5A and -1A (using voltage amplitudes of +107V and -83V), with recovery measured to -0.25A, using the AVX-TRR-NXPB-SOD123W test jig. The measured t_{RR} is 21 ns (meeting the datasheet specification of < 35 ns).

Same waveform, but showing the pulse + to - switching time.

5 ns/div. 200 mA/div:

5 ns/div. 200 mA/div:

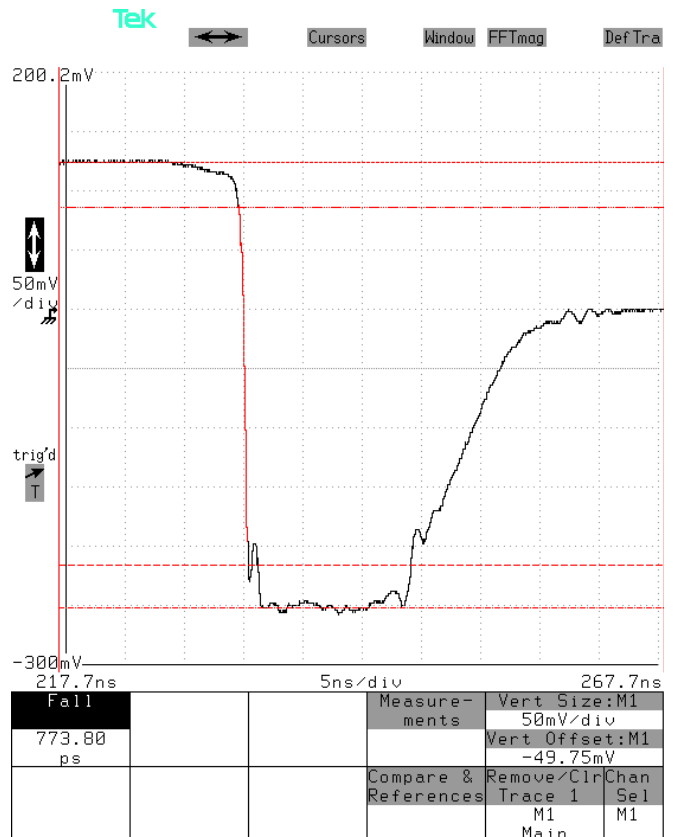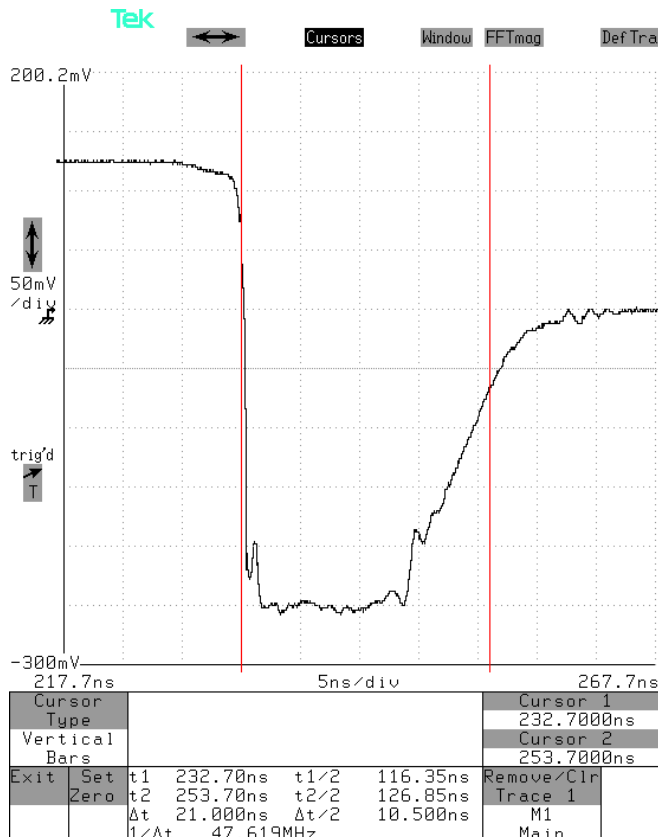

Reverse recovery transient of a PMEG6045ETPX at +0.5A and -0.5A (using voltage amplitudes of +107V and -56V), with recovery time measured at -0.1A, using the AVX-TRR-NXPB-SOD128 test jig. The measured t_{RR} is 17.5 ns (meeting the datasheet specification of < 20 ns).

5 ns/div. 200 mA/div:

