




info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5


PERFORMANCE CHECKSHEET

Model: AV-107C-B-PN
Type: Pulsed Laser Diode Driver
S.N.: 14288
Date: October 21, 2022

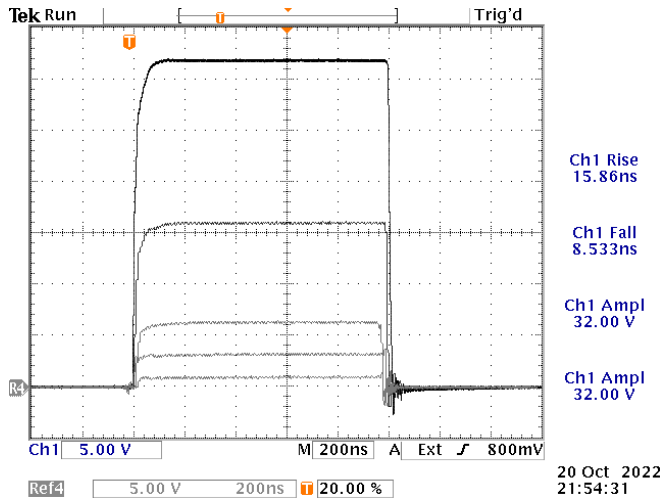


+0.3 / +1 / +2 / +5 / +10A into a 3.2 Ohm load installed on the rear panel. 5 V/div, 200 ns/div.

- a) Output Signal Amplitude: up to $\pm 10A$
- b) Pulse Width (FWHM): 100 ns to 1 us
- c) Rise Time (20%-80%): < 20 ns
- d) Fall Time (80%-20%): < 20 ns
- e) PRF: 1 Hz – 5 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

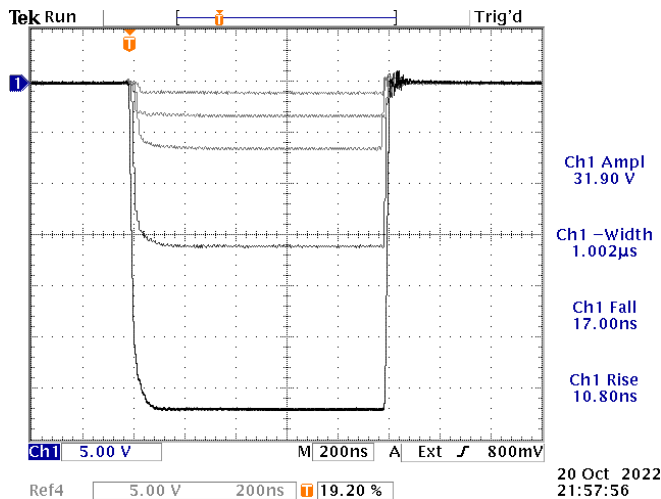

-0.3 / -1 / -2 / -5 / -10A into a 3.2 Ohm load installed on the rear panel. 5 V/div, 200 ns/div.

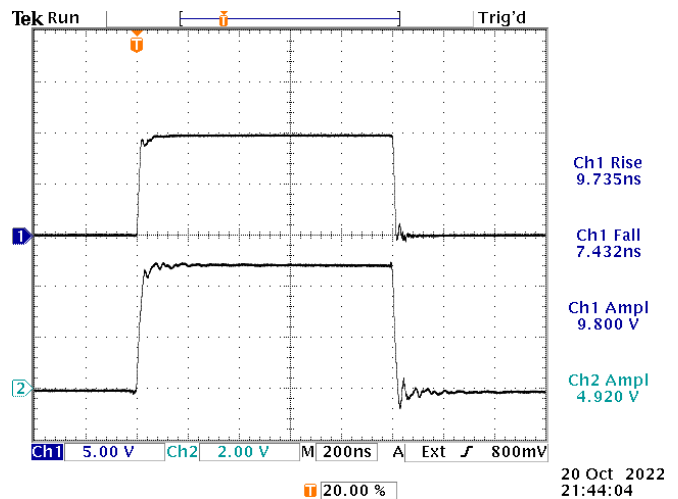

Top: +10A into the supplied AV-CTL1-ENC test load (0.971Ω). 1 us pulse width. 5 V/div, 200 ns/div.
Bottom: Monitor output into 50Ω.