



info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET


Model: AVR-EBF6-B-AC22-NOFILT
Type: Forward Recovery Test System
S.N.: 14471
Date: October 8, 2024

Output Amplitude: 100 mA to 1 A
Pulse Width (FWHM): 200 ns to 10 us
Rise Time (10%-90%): N/A (depends on the user-supplied filter)
PRF: 1 Hz - 10 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms

1N5819 sample waveform

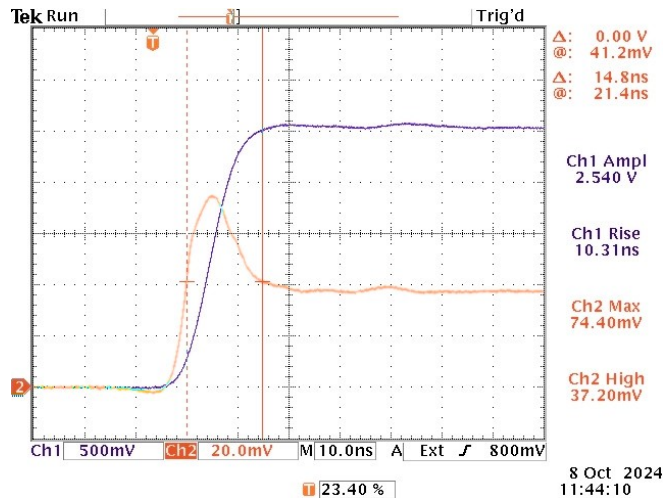


Step waveform: MON output ($V_{IN}/10$, +25.5V, with ~ 10 ns rise time). 500 mV/div, 10 ns/div.

Peaked waveform: Main output ($V_{DUT}/10$). 20 mV/div, 10 ns/div.

Shows $V_{FM} = 0.744V$, and $t_{FR} = 14.8$ ns for $I_F = 500$ mA, using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MIX test jig and an AVX-FILT-10NS filter.

1N5811 sample waveform

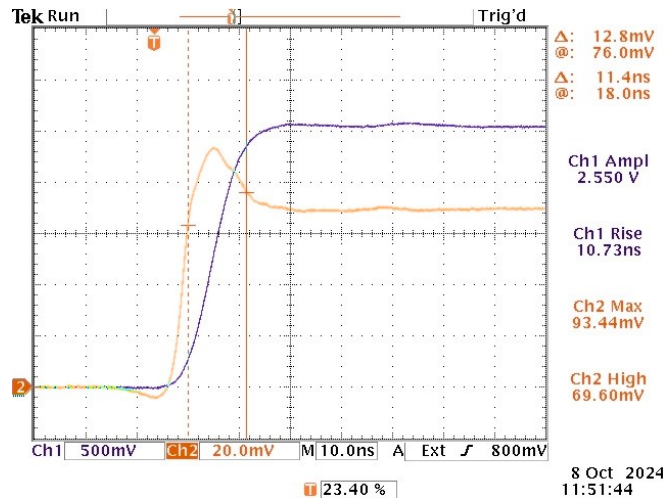

Step waveform: MON output ($V_{IN}/10$, +25.5V, with ~ 10 ns rise time). 500 mV/div, 10 ns/div.

Peaked waveform: Main output ($V_{DUT}/10$). 20 mV/div, 10 ns/div.

Shows $V_{FM} = 0.9344V$, and $t_{FR} = 11.4$ ns for $I_F = 500$ mA, using the recovery point 10% above steady state.

Tested using an AVX-TFR-SQMELEF test jig and an AVX-FILT-10NS filter.