



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
<http://www.avtechpulse.com>

P.O. BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

INSTRUCTIONS

S5 OPTION FOR AV-155A-PN-B, S/N 10004

- 1) The pin sockets on the AV-LZ6 output PCB are designed to mate with the a TO-18 style 9mm diode package as shown below:

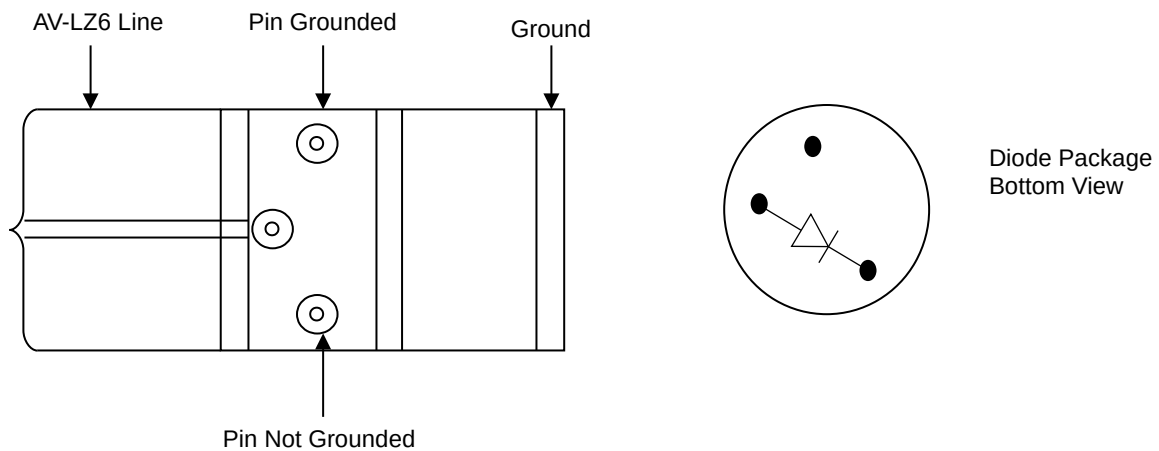

- 2) The above configuration requires that the AV-155A-B-PN polarity be positive (since the cathode of the diode is grounded when the package is inserted into the socket).
- 3) The white nylon adjustment screw is to insure that the diode case does not contact the AV-LZ6 input center conductor.
- 4) For additional assistance:

Tel: (613) 226-5772
Fax: (613) 226-2802
Email: info@avtechpulse.com